



DELL P Series 34 Curved USB-C Monitor - P3421W

Brand : DELL

Product family: P Series

Product code: DELL-P3421WM

Product name : 34 Curved
USB-C Monitor - P3421W



- 86.72cm (34.14") Quad HD 3440 x 1440 W-LED IPS
- 8ms, 21:9, 300cd/m², 1000:1
- USB, HDMI, DisplayPort
- 86.72cm (34.14") Quad HD 3440 x 1440 W-LED IPS, 21:9, 300cd/m², 1.07B, 8ms, 1000:1

DELL P Series 34 Curved USB-C Monitor - P3421W:

Productivity that pulls you in

Focus like never before on this immersive, curved monitor with a WQHD screen, improved cable management and up to 65W of power delivery.

DELL P Series 34 Curved USB-C Monitor - P3421W. Display diagonal: 86.7 cm (34.1"), Display resolution: 3440 x 1440 pixels, HD type: Quad HD, Display technology: LCD, Response time: 8 ms, Native aspect ratio: 21:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in USB hub, USB hub version: 3.2 Gen 1 (3.1 Gen 1). VESA mounting, Height adjustment. Product colour: Silver




Display		Ports & interfaces	
Display diagonal *	86.7 cm (34.1")	Audio input	✗
Display resolution *	3440 x 1440 pixels	Headphone out *	✗
HD type *	Quad HD	Network	
Native aspect ratio *	21:9	Wi-Fi	✗
Display technology *	LCD	Ergonomics	
Panel type *	IPS	VESA mounting *	✓
Backlight type	W-LED	Panel mounting interface	100 x 100 mm
Touchscreen *	✗	Cable lock slot *	✓
Display brightness (typical)	300 cd/m ²	Height adjustment *	✓
Response time	8 ms	Height adjustment	15 cm
Anti-glare screen	✓	Pivot	✗
Screen shape *	Curved	Swivelling	✓
Screen curvature rating	3800R	Swivel angle range	-30 - 30°
Supported graphics resolutions	3440 x 1440	Tilt adjustment	✓
Supported video modes	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	Tilt angle range	-5 - 21°
Contrast ratio (typical) *	1000:1	LED indicators	Power
Maximum refresh rate *	60 Hz	Power	
Viewing angle, horizontal	178°	Energy efficiency class (SDR) *	F
Viewing angle, vertical	178°	Energy efficiency class (HDR) *	Not available
Display number of colours *	1.07 billion colours	Energy consumption (SDR) per 1000 hours *	32 kWh
Response time (fast)	5 ms	Power consumption (typical) *	31.5 W
Pixel pitch	0.2325 x 0.2325 mm	Power consumption (standby) *	0.3 W
Pixel density	109 ppi	Power consumption (max)	126 W
Horizontal scan range	30 - 85 kHz	Power consumption (off)	0.2 W
Vertical scan range	48 - 85 Hz	AC input voltage	100 - 230 V
Viewable size, horizontal	80 cm	AC input frequency	50 - 60 Hz
Viewable size, vertical	33.5 cm	Power supply type	Internal
Viewable size diagonal	86.7 cm		

Display		Power	
Display diagonal (metric)	86.72 cm	Energy efficiency scale	A to G
High Dynamic Range (HDR) supported	✗	Annual energy consumption	80.31 kWh
RGB colour space	sRGB	Operational conditions	
sRGB coverage (typical)	99%	Operating temperature (T-T)	0 - 40 °C
Performance		Storage temperature (T-T)	-20 - 60 °C
NVIDIA G-SYNC *	✗	Operating relative humidity (H-H)	20 - 90%
AMD FreeSync *	✗	Storage relative humidity (H-H)	10 - 90%
Flicker-free technology	✓	Operating altitude	0 - 5000 m
Multimedia		Non-operating altitude	0 - 12192 m
Built-in speaker(s) *	✗	Packaging content	
Built-in camera *	✗	Stand included	✓
Design		Cables included	AC, DisplayPort, HDMI, USB Type-C
Market positioning *	Business	Quick start guide	✓
Product colour *	Silver	Weight & dimensions	
Front bezel colour	Black	Width (with stand)	815.7 mm
Detachable stand	✓	Depth (with stand)	237.4 mm
Feet colour	Silver	Height (with stand)	541.1 mm
Heavy metals free	Hg (mercury)	Weight (with stand)	10.3 kg
Ports & interfaces		Width (without stand)	815.7 mm
Built-in USB hub *	✓	Depth (without stand)	58.1 mm
USB hub version	3.2 Gen 1 (3.1 Gen 1)	Height (without stand)	365.4 mm
USB upstream port type	USB Type-C	Weight (without stand)	6.7 kg
Number of upstream ports	2	Packaging data	
USB Type-A downstream ports quantity	4	Package weight	14.9 kg
USB Type-C downstream ports quantity	1	Sustainability	
USB Type-C DisplayPort Alternate Mode	✓	Sustainability certificates	RoHS, EPEAT Gold, ENERGY STAR
DVI port	✗	European Product Registry for Energy Labelling (EPREL) code	347530
HDMI *	✓	Logistics data	
HDMI ports quantity	1	Harmonized System (HS) code	85285210
DisplayPorts quantity	1	Other features	
DisplayPort version	1.2	On/off switch	✓
		Picture-by-Picture (PbP)	✓



5397184567722

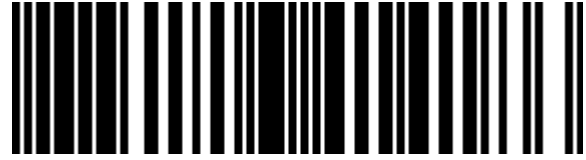

0884116414186



884116414186

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.