


Adjustable Depth Universal Fixed Rack Shelf

ADJSHELF

FR: Guide de l'utilisateur - fr.startech.com
 DE: Bedienungsanleitung - de.startech.com
 ES: Guía del usuario - es.startech.com
 NL: Gebruiksaanwijzing - nl.startech.com
 PT: Guia do usuário - pt.startech.com
 IT: Guida per l'uso - it.startech.com
 JP: 取扱説明書 - jp.startech.com

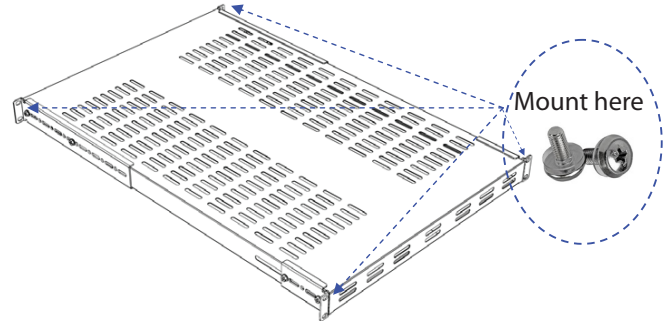

Package Contents

- 1 x Slotted fixed shelf
- 2 x Front mounting bracket (Short)
- 2 x Rear mounting bracket (Long)
- 8 x M5 screws
- 8 x M5 cage nuts
- 1 x Instruction manual
- 8 x M5 Truss head screws
- 8 x M5 Flanged lock nuts

Assembly

Use the assembly instructions below to install both the front and back mounting brackets.

1. Align the mounting bracket with the slot on the side of the slotted fixed shelf. Make sure that the end of the bracket is also aligned with the corner of the slotted fixed shelf and the rack mounting tab is facing out.
2. On the outside of the slotted fixed shelf, insert a M5 truss head screws (two per bracket) into the screw hole on the mounting bracket and through the slot on the slotted fixed shelf.
3. On the inside of the slotted fixed shelf, use a M5 flanged lock nut (two per mounting bracket) and screw it onto the end of the M5 truss head screw.

Installation

Warning: Use caution and proper lifting techniques when lifting the slotted fixed shelf.

1. Insert the M5 cage nuts (two per mounting rail) into the square mounting holes on the mounting rails.
2. Align the rack mounting tabs on the front and rear mounting brackets with the M5 cage nuts on the corresponding mounting rail.
3. Insert a M5 screw (two per mounting rail) through the rack mounting tab and into the M5 cage nut.
4. Tighten all the M5 screws.

Adjusting the slotted fixed shelf

1. Loosen the M5 truss head screws on the front and rear mounting brackets.
2. Extend the front and rear mounting brackets to fit the depth of the rack/cabinet.
3. Tighten all the M5 truss head screws that were loosened in step 1.

Product diagram

Note: Actual product may vary from photos




Adjustable Mounting Range

(A) 495 mm (B) 129 mm (C) 974 mm (D) 608 mm

StarTech.com

Hard-to-find made easy®

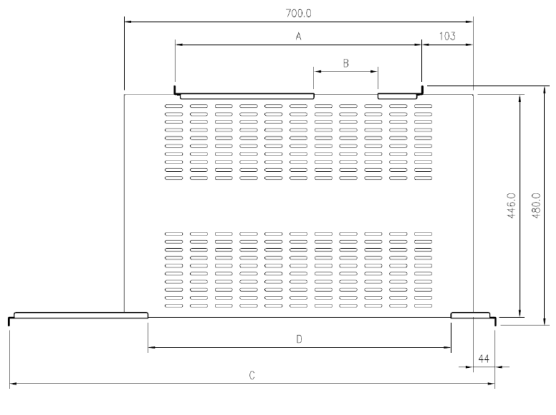

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a lifetime guarantee.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.