
SF680(P)



Ì́^H .

Мах Load 350lb (158kg)

SMARTMOUNT. Universal Flat Wall Mount

FOR 60" TO 98" DISPLAYS*

Peerless-AV's SmartMount[®] Universal Flat Wall Mount delivers an ultra-slim profile designed to hold large displays up to 350lb. Installation and maintenance are made easy with the SF680's robust feature set. Auto-latching adaptor rails automatically secure the display without the use of a tool. The mount's built-in kickstand holds the display safely from the wall during cable routing, while the open wall plate allows for increased electrical and cable management options. Horizontal and vertical display adjustment allow for quick fine-tuning of the mounted display.

OPEN & EASY TO HANG WALL PLATE

Total wall access reduces installation time and allows for increased electrical/cable management options


> HORIZONTAL & VERTICAL ADJUSTMENT Post-installation leveling and side-to-side

- Universal mount fits displays with mounting patterns up to 1100 x 650mm (43.29" W x 25.59" H)

Mounting Pattern

1100 x 650mm (43.29" x 25.59")

- Low-profile design holds display only 1.73" (44mm) from the wall
- Easy hang wall plate allows a bolt to be pre-installed to ease wall plate installation
- Lateral display adjustment up to 19.25" (489mm)
- 1" of post-installation vertical adjustment provides flexibility in the installation
- Includes fastener pack with all necessary mounting and display attachment hardware (including M10)
- For mounts requiring theft resistant hardware, installed with security tool (included), please purchase SF680
- For mounts requiring standard hardware, installed with a Philips screwdriver, please purchase SF680P

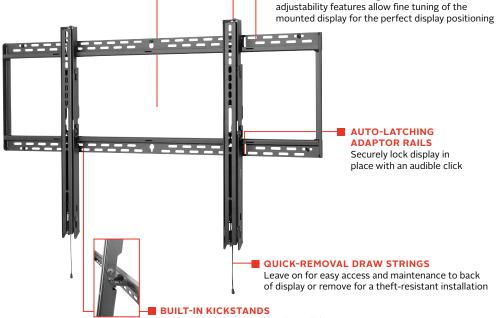

Hold the display safely from the wall for cable routing and effortless maintenance



yet compact installation.



Comes in color packaging with included installation hardware and easy to follow instructions.

Please visit peerless-av.com/en-us/patents for patent information.

*This display size range is simply a guideline for product selection. Displays larger than the screen size range may still be compatible as long as they fall within the VESA® pattern and max weight of the Peerless-AV® product.



info@peerless-av.com

دلال) ه RoHS

Speerless-av.com

Model Numbers


SF680P SF680 SmartMount[®] Universal Flat Wall Mount for 60" to 98" Displays - Standard Models SmartMount[®] Universal Flat Wall Mount for 60" to 98" Displays - Security Models

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SF680(P)	45.75" x 27.48" x 1.73" (1162 x 698 x 44mm)	17.30lb (7.8kg)	350lb (158kg)	Scratch Resistant Fused Epoxy	Semi-Gloss Black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE		PACKAGE CONTENTS	UNITS IN PACKAGE
SF680(P)	46.70" x 2.30" x 15.40" (1185 x 58 x 390mm)	20.30lb (9.21kg)	SF680: SF680P:	735029242239 735029242246	Wall Mount, Wall and Display Installation Hardware, Installation Instructions	1
Accessories	ACC615:6-pack Metal Stud Fastener KitACC309:Video Conference ShelfACC-UCM:Universal AV Component Mount		ESHV models: IBA4-W:	HV models: AV Wall ShelvesIBA4-W: Easy Mount Recessed Low Voltage Cable Plate		

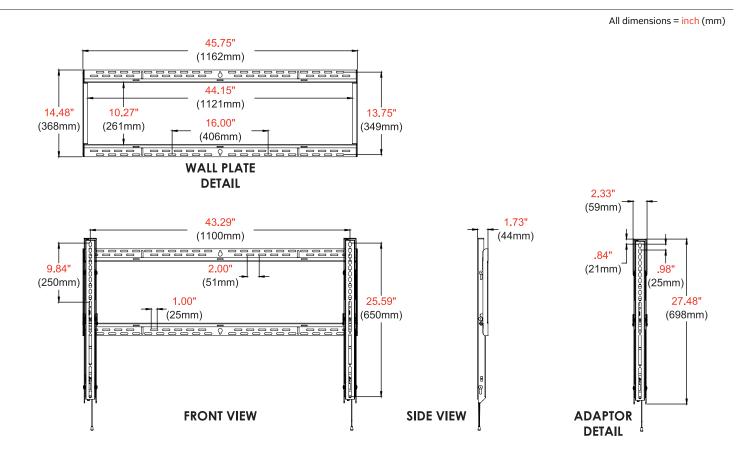

Architect Specifications

The SmartMount[®] Universal Flat Wall Mount shall be a Peerless-AV model SF680(P) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit **peerless-av.com** to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

2300 White Oak Circle Aurora, IL 60502 USA (800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

Peerless-AV

Peerless-AV EMEA Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom +44 (0) 1923 200100 Fax: +44 (0) 1923 200101 Peerless-AV Latin America Av. de las Industrias 413 Parque Industrial Escobedo General Escobedo, N.L., México, 66062 +52 (81) 8384-8300 Fax: +52 (81) 8384-8360

