


PALIT® GEFORCE RTX™ 4070 SUPER

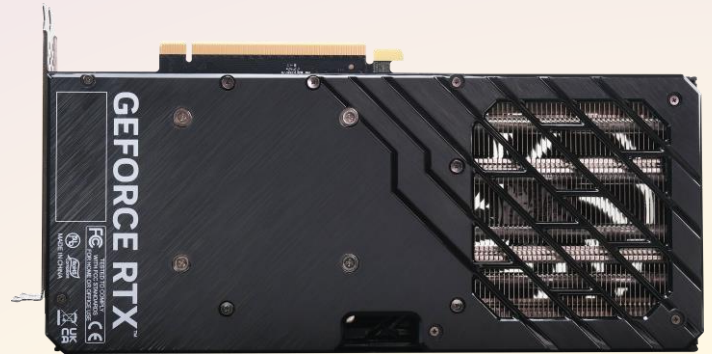

Dual Fan design

Backplate included

RGB Lighting

0dB Technology



Key Features

- ❑ Dedicated Ray Tracing Cores
- ❑ Dedicated Tensor Cores
- ❑ NVIDIA DLSS 3
- ❑ Game Ready and NVIDIA Studio Drivers
- ❑ NVIDIA® GeForce Experience™
- ❑ NVIDIA Broadcast
- ❑ NVIDIA G-SYNC®
- ❑ NVIDIA GPU Boost™
- ❑ GDDR6X Graphics Memory
- ❑ PCI Express® Gen 4
- ❑ Microsoft DirectX® 12 Ultimate
- ❑ Vulkan RT APIs, Vulkan 1.3, OpenGL 4.6
- ❑ HDCP 2.3
- ❑ DisplayPort 1.4a, up to 4K at 240Hz or 8K at 60Hz with DSC, HDR
- ❑ As specified in HDMI 2.1a: up to 4K 240Hz or 8K 60Hz with DSC, Gaming VRR, HDR

Minimum System Requirements

- ❑ PCI Express-compliant motherboard with one dual-width x16 graphics slot
- ❑ 750 W or greater system power supply
- ❑ One 16-pin PCIe 12VHPWR or two 8-pin supplementary power connectors
- ❑ Microsoft Windows® 11, Windows® 10 64-bit, Linux 64-bit

DUAL OC

Part Number	NED407SS19K9-1043D
EAN Code	4710562244311
GPU	RTX 4070 SUPER
CUDA Core	7168
Core Clock	1980 MHz
Boost Clock	2550 MHz
DRAM Type	GDDR6X
DRAM Amount	12 GB
DRAM Interface	192 bits
DRAM Speed	21 Gbps
DRAM Bandwidth	504 GB/s
Board Power	220 W
Output	DP 1.4a x 3 HDMI 2.1a x 1
Bracket	2 slot
Cooler	2 slot
Board size	269.1 x 127.5 x 40.1 mm
Box size	342 x 221 x 66 mm
Retail Pack	10 pcs per carton
Box including	GeForce RTX 4070 SUPER Power Cable

Product Specifications and Features are for reference only and are subject to change without prior notice.