


Overview

HPE Smart Array E208e-p SR Gen10 Controller

The HPE Smart Array E208e-p SR Gen10 Controller, supporting 12Gb/s SAS and PCIe 3.0, is an ideal cost-effective solution for RAID 0, 1, 5, and 10 and Software Defined Storage solutions on externally attached drives. This controller operates in Mixed Mode which combines RAID and HBA operations simultaneously. It has eight external SAS lanes, allowing connection to externally attached SAS or SATA drives, and provides enterprise-class reliability, security and efficiency needed to address your evolving data storage needs. This controller offers enhanced security by encrypting data-at-rest on any drive with HPE Smart Array SR Secure Encryption.

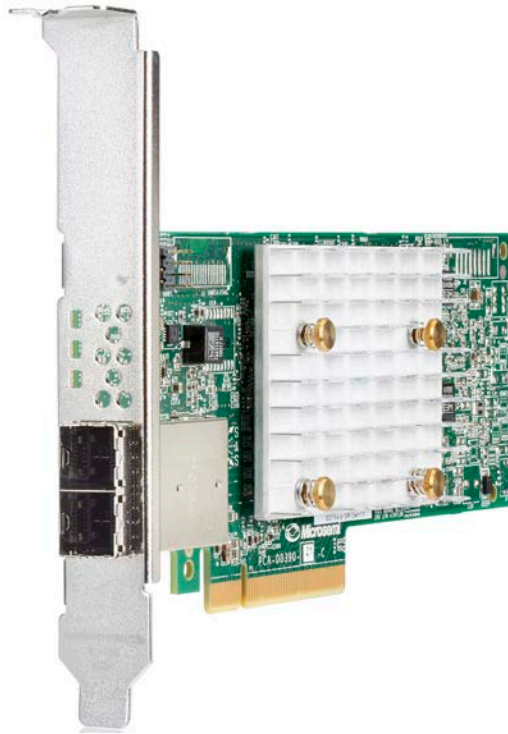

Model

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller

804398-B21

Kit Contents: E208e-p controller, high profile bracket, and low profile bracket.

Standard Features

Key Features

- Storage interface (SAS/SATA)
 - 8 SAS lanes across 2 x4 external Mini-SAS HD ports
 - 12Gb/s SAS, 6Gb/s SATA technology
 - Mix-and-match SAS and SATA drives to the same controller
 - Support for SAS tape drives
- PCI Express 3.0 x8 link
- RAID 0, 1, 5, 10
- Mixed Mode (RAID logic drives and HBA physical drives simultaneously)
- Legacy and UEFI boot operation
- UEFI System Utilities (storage configuration)
- Up to 238 physical drives
- Up to 64 logical drives
- HPE Smart Array SR Secure Encryption (optional license)
- HPE SSD Smart Path
- Rapid Parity Initialization (RPI)
- Rapid rebuild
- Drive Sanitize
- Performance Optimization-Degraded Reads and Read Coalescing
- Power efficiency
- Seamless upgrades from HPE Smart Array Software RAID
- Seamless upgrades to HPE Smart Array P-class Controllers

Ports

- External: 8 SAS/SATA lanes across 2 x4 external Mini-SAS HD ports

Form Factor

- PCIe Plug-in Controller (occupies a PCIe expansion slot)

Performance

- 12Gb/s SAS (1200 MB/s theoretical bandwidth per physical lane)
- 6Gb/s SATA (600 MB/s theoretical bandwidth per physical lane)
- PCI Express 3.0 x8 link width

Fault Prevention

The following features offer detection of possible failures before they occur:

- Predictive drive failure detects possible drive failure before it occurs, allowing replacement of the component before failure occurs.
- Background surface scan checks drives during inactive periods and automatically remaps bad sectors, ensuring data integrity.
- HPE SmartSSD Wear Gauge reports the amount of lifetime remaining on your SSDs.

Fault Recovery

Minimizes downtime, reconstructs data, and facilitates a quick recovery from drive failure

- Recovery ROM: This feature protects the user from a firmware image corruption by storing a redundant copy of the firmware image. If the active firmware image becomes corrupt, the controller will use the redundant firmware image and continue operating.
- On-Line Spares: There is no limit to the number of spare drives that can be installed prior to drive failure. If a failure occurs, recovery begins with an On-Line Spare and data is reconstructed automatically.
- DRAM ECC detects and corrects data bit errors.

HPE SSD Smart Path

The HPE SSD Smart Path feature included in the Smart Array software stack improves Solid State Disk (SSD) read performance by up to 4x. HPE SSD Smart Path chooses the optimum path to the SSD and accelerates reads for all RAID levels and RAID 0 writes.

HPE Smart Array SR Secure Encryption

HPE Smart Array SR Secure Encryption is a Smart Array controller-based data encryption solution that protects sensitive, mission critical data. This is an enterprise-class encryption solution for data-at-rest on any drives attached to the HPE Smart Array controllers including data on the controller cache. Secure

Standard Features

(optional license)

Encryption requires an optional license per server (see Related Options for more information on the license).

The solution is available for both local and remote key management mode deployments. Local Key Management Mode is focused on single server deployment where there is one Master key per controller that is managed by the user. Remote Key Management Mode is for enterprise wide deployments from just a few servers to thousands of servers.

For more information please visit <http://www.hpe.com/servers/secureencryption>

Warranty


The warranty for this device is 3 years parts only.

Warranty Upgrade Options

- Response - Upgrade on-site response from next business day to same day 4 hours.
- Coverage - Extend hours of coverage from 9 hours x 5 days to 24 hours x 7 days.
- Duration - Select duration of coverage for a period of 1, 3, or 5 years.
- Warranty upgrade options can come in the form of Care Packs, which are sold at the HPE System level this product attaches too.

Naming Framework

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

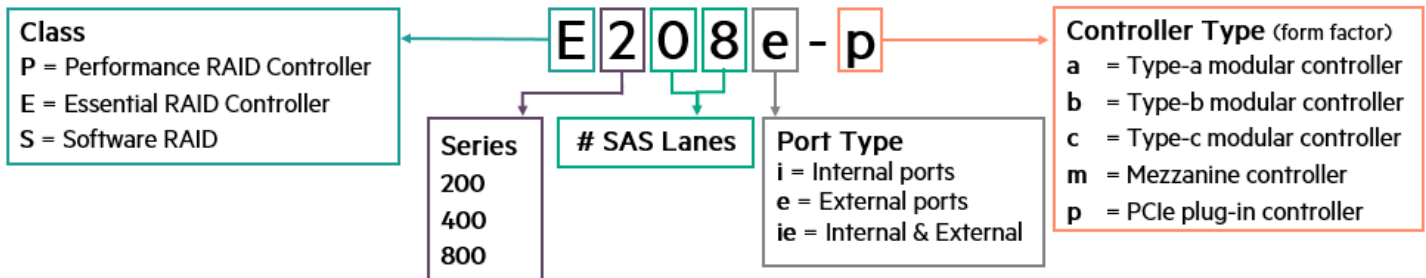

Compatibility

Server Support	HPE ProLiant DL360 Gen10 HPE ProLiant DL380 Gen10 HPE ProLiant DL560 Gen10 HPE ProLiant DL580 Gen10 HPE ProLiant ML110 Gen10 HPE ProLiant ML350 Gen10	HPE ProLiant XL170r Gen10 HPE ProLiant XL190r Gen10 HPE ProLiant XL230K Gen10
Disk Enclosure Support	HPE D3610 Disk Enclosure HPE D3710 Disk Enclosure HPE D6020 Disk Enclosure	HPE MSA 1040 SAN Storage HPE MSA 1050 SAN Storage HPE MSA 2040 SAN Storage HPE MSA 2050 SAN Storage
Tape Support	For more information on supported SAS tape drives, SAS Tape autoloaders, and SAS tape libraries, see the HPE Data Availability, Protection and Retention Compatibility Matrix at: http://www.hpe.com/storage/daprcompatibility	
Operating Systems	Microsoft Windows Server Microsoft Windows Hyper-V Server VMware vSphere Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) CentOS ClearOS <p>NOTE: HPE Smart Array controllers are supported by the server operating system. For more information on HPE's server operating systems and virtualization software, please visit: http://www.hpe.com/info/ossupport</p>	
Storage Management Software Suite	HPE Smart Storage Administrator (SSA) GUI HPE Smart Storage Administrator (SSA) CLI HPE Smart Storage Administrator (SSA) Scripting HPE Intelligent Provisioning UEFI System Utilities (storage configuration) UEFI Storage RESTful <p>NOTE: For additional information see the HPE Smart Array SR Gen10 Configuration Guide at: http://www.hpe.com/info/SmartArrayGen10-docs</p>	

Service and Support

HPE Support Services **Protect your business beyond warranty with HPE Support Services**

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. HPE is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

Recommended Support

HPE Proactive Care* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

HPE Proactive Care* with 6 hour call-to-repair commitment, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years' proactive reporting and advice with our highest level of hardware support - HPE's 24x7, six hour hardware call-to-repair. HPE is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

*HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

HPE Education Services Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

<http://www.hpe.com/ww/learn>

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>

HPE's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

*HPE Support Center Mobile App is subject to local availability

Service and Support

Parts and materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner. <https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

HPE Installation and Startup Service provides for the installation and startup of HPE technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

NOTE: The Smart Array E208e-p SR Gen10 Controller is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased.

- Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [HERE](#).

Additional Service Information

<http://www.hpe.com/services>

HPE Smart Array Supporting Documents

For additional support documents, including and configuration guide and user guides, please visit: <http://www.hpe.com/info/SmartArrayGen10-docs>.

Related Options

HPE Smart Array SR Secure Encryption

HPE Smart Array Secure Encryption/Data at Rest Encryption/per Server Entitlement E-LTU

Q2F26AAE

NOTE: HPE Secure Encryption licensing is based on the number of servers requiring encryption for direct attached storage.

NOTE: For more information visit: <http://www.hpe.com/servers/secureencryption>

Summary of Changes

Date	Version History	Action	Description of Change
25-Sep-2017	From Version 1 to 2	Added	Added compatibility with DL580, ML110, ML350, XL170r, and XL190r Gen10 servers; Compatibility with MSA 1050 and MSA 2050; naming framework.
11-Jul-2017	Version 1	Added	New QuickSpecs.



Sign up for updates



**Hewlett Packard
Enterprise**

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

a00008183ENW - 15917 - Worldwide - V2 - 25-September-2017