

#### Thin, Small & Light - Great for one-handed solutions

The Socket Mobile S800 is a 1D imager barcode scanner with Bluetooth® wireless technology. Small, thin and easy to use, the scanner is optimized for attaching to mobile devices, enabling one-handed operation. The S800 can scan barcodes printed on labels or displayed on device screens. It reads all the most popular 1D barcodes and is perfect for retail point of sale, inventory management, sales order entry, field service, and other mobile business applications.


Approximately the same size as a credit card measuring less than  $\frac{1}{2}$  inch (1.27cm) thick and weighing less than two ounces, the S800 is one of the smallest and lightest barcode scanners available in the market today. The S800 slips neatly into your pocket and fits comfortably in the palm of your hand when attached to a smartphone.







Certified by Apple® for iOS devices (iPad®, iPhone®, iPod Touch® devices) and compatible with Android and Windows®

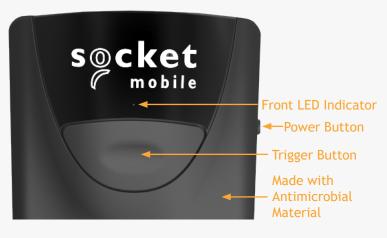



#### **Features**

- Bluetooth Wireless Technology Connects easily to a wide range of Bluetooth enabled smartphones, tablets, notebook and desktop computers
- Certified by Apple® for iOS devices Guaranteed Compatibility With our SDK integrated in over 700+ applications, Socket Mobile scanners are one of the most natively integrated scanners available today. Socket Mobile Scanners are also 100% compatible with any application out-of-the-box in HID (keyboard emulation) mode.
- Compatible with all Android and Windows devices and applications
- Scanning Reads all common 1D barcodes
- Size & Weight Measuring less than ½ inch (1.27cm) thick and weighing less than two ounces (48g)
- **User Feedback** With audible tones, hand pulsation and Bluetooth indicators
- Long-Lasting Battery Power to last over a full work day, up to 9 hours
- One-Handed Operation Attachable clip included
- **Protective Material** Made with antimicrobial material for protection against potentially harmful bacteria
- Application Integration Socket Mobile's Capture SDK enables easy integration in your applications to improve business productivity with fast, efficient and reliable data transfer over Bluetooth wireless technology.
- Accessories DuraCase, lanyard and wrist strap available (sold separately)
- Designed and Assembled in the USA
- Developer Support Available
- 1-Year Warranty

#### SCANNING PERFORMANCE

Default Barcode Symbologies:

CODE 39, CODE 128, EAN 8, EAN 13, GS1 DATABAR, GS1 DATABAR EXPANDED STACKED, GS1 DATABAR


EXTENDED, GS1 DATABAR LIMITED, INTERLEAVED 2 OF 5, ISBT 128, UPC A, UPC E (0)

Supported Barcode Symbologies:

1D Symbologies: BOOKLAND EAN, Codabar, CODE 39, CODE 39 ASCII (EXTENDED), CODE 39 Trioptic, CODE 93, CODE 128, DISCRETE 2 OF 5, EAN 8, EAN 13, EAN 128, EAN 128 + COMPOSITE, EAN-UCC 128, GS1 128, GS1 DataBar-14, GS1 DATABAR, GS1 DATABAR EXPANDED STACKED, GS1 DATABAR EXTENDED, GS1 DATABAR LIMITED, INTERLEAVED 2 OF 5, ISBT 128, KOREAN 3 OF 5, MATRIX 2 OF 5, MSI, PLESSEY, RSS EXPANDED STACKED, RSS-14, TELEPEN, UPC A, UPC E (0), UPC E1

Scan Angle: 53.3" + 3" Optical Resolution: 5 mil minimum Print Contrast: 20% minimum

Reading Distance:

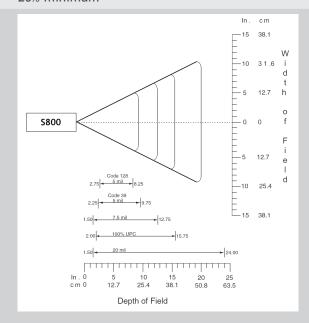

1D codes 5.7 to 50.8 cm (2.25 to 20 in) Resolution Depends on symbol size, symbology, label media, W-N ratio scan angle

## **SCANNER TYPE**

Technology: 1D Barcode Linear Imager

Battery: Lithium ion rechargeable battery

Charge Time: 4 Hours

Standby time: 21 hours Battery Life:

Active Scan Time: 8,000 scans within 9 hours (based on 1 scan every 4 seconds) Per Full Charge:

49,000 scans within 4 hours (based on 2 scans every second)

Battery life varies depending on ambient temperature, ambient light, age of battery, etc. Note:

# BLUETOOTH (WIRELESS CONNECTION) 8

Class 2 Bluetooth, version 2.1 + EDR (Enhanced Data Rates) with 56-bit data encryption Bluetooth Radio:

Up to 10 m (33 ft.) depending on environment, range limit is usually due to the Host Device (phone, Bluetooth Range:

tablet or notebook)

Bluetooth Profiles: Basic Mode - Human Interface Device (HID)\*, Application Mode - Serial Port Profile (SPP) and Application

Mode - MFi-SPP. Some Operating Systems or smartphone/tablet models may support only one profile.

\*By default, the scanner is set to Basic Mode (HID).

# PHYSICAL CHARACTERISTICS

Dimensions: 3.42 (L) x 2.12 (W) x .52 (H) in (86.9 x 53.94 x 13.43 mm)

Weight/Mass: 1.5 oz (43.0 g)

LEDs: Scan LED: Green and Red

Bluetooth LED: Blue

Buttons: Trigger Button: Scan

Power Button: On/Off

# **USER ENVIRONMENT**

Ambient Light: From 0 to 100 000 lux

From pitch black to direct sun light

Operating Temperature:  $+32 \text{ to } +122 \degree \text{F } (0 \text{ to } +50 \degree \text{C})$ Storage Temperature:  $-22 \text{ to } +158 \degree \text{F } (-30 \text{ to } +70 \degree \text{C})$ 

Relative Humidity: 95% at 60° C (140° F) (non-condensing)

Sealing: IP40 (5% to 95% non-condensing)

Drop Specifications: Multiple 3.3 ft. drops to vinyl covered concrete

## **OPERATING SYSTEM COMPATIBILITY**

Android OS: Basic Mode (HID)\* & Application Mode (SPP) Mac OS: Basic Mode (HID)\* only

Apple iOS: Basic Mode (HID)\* & Application Mode (MFi-SPP) Windows: 10, 8, and 7: Basic Mode (HID)\* & Application Mode (SPP)

Compatible with devices supporting Basic Mode (HID)\*

protocol

\*By default the scanner is in Basic Mode (HID).

Certified by Apple® for iOS devices (iPad®, iPhone®, iPod Touch®) and compatible with Android and Windows®.











# **CERTIFICATION & REGULATORY**

Electrical Safety: Certified to IEC 60950-1, UL 60950-1, CAN/CSA C22.2

Environmental: RoHS

EMI / RFI: FCC Part 15 Class C, RSS 210, iCES 003, C-Tick, CISPR 22, CE EN55022, EN55024, TELEC

LED Safety: IEC 60825-1, EN 60825-1



















# **WARRANTY**

Scanner: Standard one year limited warranty

Accessories: 90 days

Extended Warranty:

www.socketmobile.com/socketcare

(sold separately)



## **COMMON USES**

Retail Hospitality

Healthcare Life Sciences

Logistics Automotive

# SINGLE PACKAGE INCLUDES - SKU# CX2881-1476

- (1) SocketScan S800, 1D Imager Barcode Scanner
- (1) Micro USB Charging Cable
- (1) Universal Klip Case



# **OPTIONAL ACCESSORIES**

DuraCase & Charging Dock:

Apple® iPod touch® for 5th & 6th generation: SKU# AC4094-1670

Samsung J3/J5: SKU# AC4118-1785 Samsung Galaxy S7: SKU# AC4125-1792



DuraCase Only:

Apple® iPod touch® for 5th & 6th generation: SKU# AC4092-1668

Samsung J3/J5: SKU# AC4117-1784 Samsung Galaxy S7: SKU# AC4124-1791



DuraCase Charging Dock



**DuraCase Charging Adapter** 



DuraCase 6 Multi-Bay Charger

Due to varying countries' outlets, the DuraCase 6 Multi-Bay Charger power chords are NOT included in the package.



DuraCase 6 Multi-Bay Charger AC Power Cord



Klip Case:

iPhone SE/5/5s: SKU# AC4066-1500 iPhone 5c: SKU# AC4078-1540

iPod touch(5th generation): SKU# AC4067-1501

Samsung Galaxy S4: SKU# AC4068-1502

**AC Power Supplies** 











UK/Ireland/South Africa: +44 7787 112109 +33 970 462 241 +8190 9808 0518 Toll-Free: +1 800 552 3300 (USA/Canada) +41 62 834 07 80

FMFA & Russia: Asia Pacific:

+41 62 834 0780 +1 510 933 3122

+1 510 933 3153 Latin America: