


in the countersunk holes.

Stalk Cover to the mount surface.



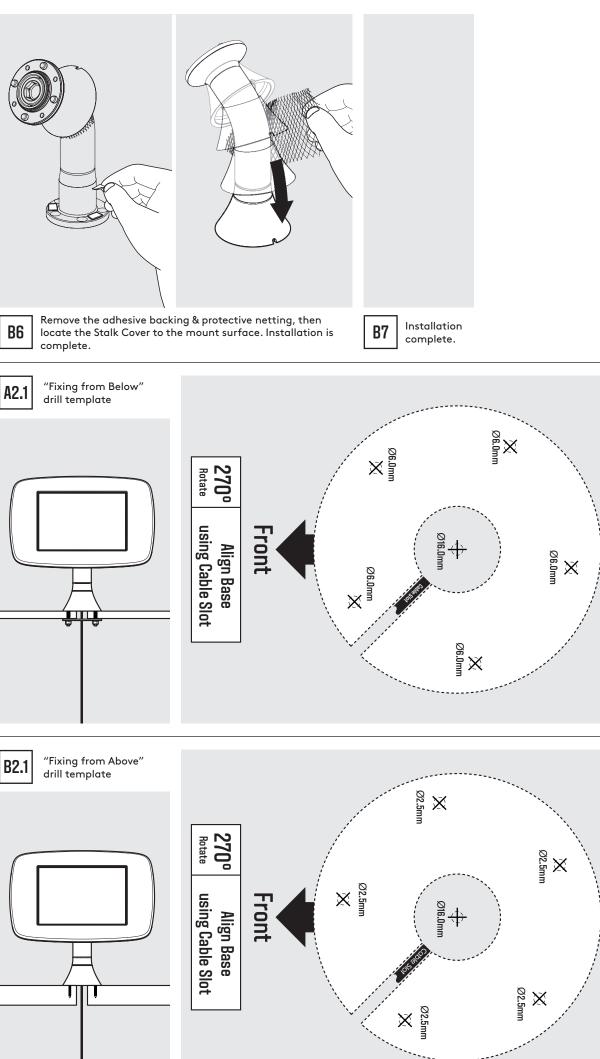

180mm - Minimum recommended distance

## bouncepad®

## Sumo Enclosure


Assembly Instructions


## **Tools Required:**

Socket Driver

Sheet Code:BP-IM-049\_REV1Release Date:01/10/2019

Copyright 2016 Spotspot Ltd. (T/A Bouncepad) all rights reserved. Confidential, no part of this publication may be reproduced or transmitted in any form without the written permission of the copyright holder.

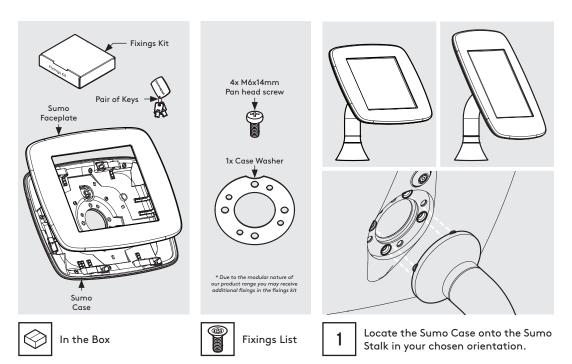

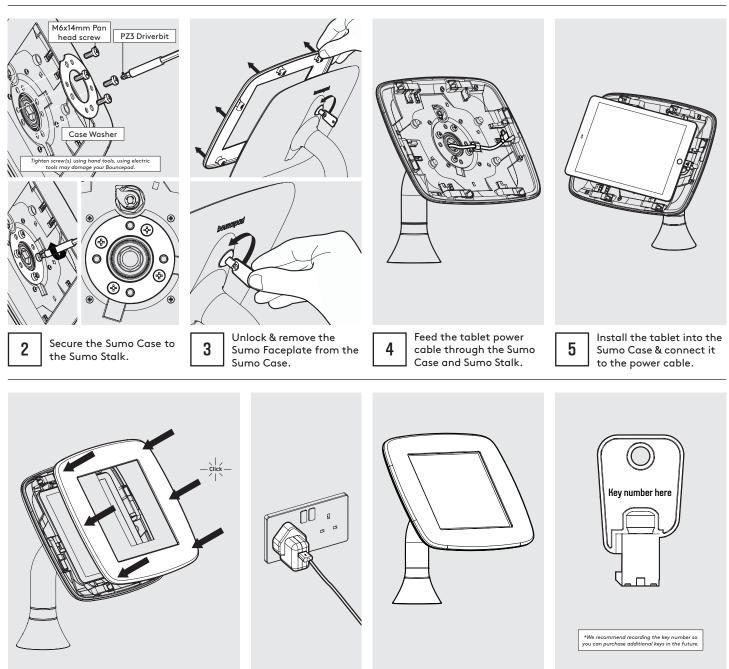

Locate the Sumo Faceplate onto the Sumo Case - pressing the Faceplate firmly down to ensure correct locking.

6

7 Connect to power & turn on.

8 Installation of the Sumo Case upon the Sumo Stalk is now complete.

Installation is now complete.

9