

## KPM150HIII

### Compact ticket printer for OEM integration

- High print quality (200 DPI)
- Paper width: from 20mm to 54mm
- Paper weight: from 80 to 180 g/m<sup>2</sup>
- Printing > 180 mm/sec
- RS232 and USB interfaces
- Highly reliable cutter: over 1,000,000 cuts
- 1D and 2D barcode printing: UPC-A, UPC-E, EAN13, EAN8, CODE39, ITF, CODABAR, CODE93, CODE128, CODE32, PDF417, DATAMATRIX, AZTEC, QR CODE
- True Font character support; Font: any language available
- Sensors: fully adjustable lower optical sensor, to suit any ticket width; upper optical sensor, gap sensor; near paper end sensor




## CHARACTERISTICS

- High durability thanks to the robust internal steel structure
- Highly reliable
- 266 MHz processor

## APPLICATIONS:

- Parking tickets
- Metro and bus tickets
- Airports: bag tags
- Self service ticketing
- Event tickets
- Hospital and theme parks wristband printing

## SOFTWARE:

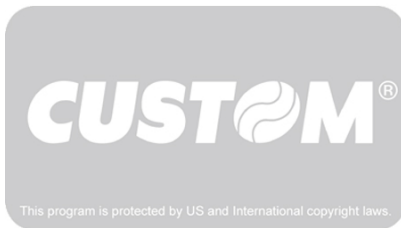

**SOFTWARE PrinterSet** : to update logos, edit characters, set operating parameters and update the printer firmware. It allows you to create a file including the different SW customizations and send them to the printer via the interface provided, for easy and fast setting.

- Remote monitor status
- Auto-installing driver for Win 7, 8, 8.1, 10 (+32/64bit support)
- CustomPowerTool

---

## ACCESSORIES




**CUT&HOLD KIT** - The printer is equipped with a Cut&Hold device as accessory, which avoids the ticket falling on the ground after print out.

## TECHNICAL SHEET

<b>Printing Method</b>	Thermal with fixed head
Number of dots	8 dots/mm
Resolution	203 DPI
Printing (mm/sec)	>180 mm/sec
Character set	PC437, PC850, PC860, PC863, PC865, International
Printing Format	Normal, height and width 1x to 2x, reverse
Printing Direction	Straight, 90°, 180°, 270°
Paper width	From 20 mm to 54 mm
Paper weight	from 80 to 180 g/m <sup>2</sup>
Emulation	CUSTOM/POS
Interfaces	RS232 + USB
Data Buffer	4 KB
Flash Memory	16 MB
Graphic Memory	2 logos - 384 x 341 dots
Drivers	Win 7, 8, 8.1, 10 (+32/64bit support)
Software Tools	Status Monitor, PrinterSet, CustomPowerTool
Power supply	24 Vdc ± 10%
Medium consumption	0.9A (12.5% dots turned on)
Head Life	100 Km / 100M pulses
MCBF	1,000,000 cuts
Operating temperature	0°C + 50°C
Dimensions	171x122(h)x114 mmwith Ticket Retention Kit 198.5x122(h)x114 mm
Weight	1.85 Kg

## MODELS



### 915FB030100300

PRINTER KPM150HIII USB RS232

CUSTOM SPA - Via Berettine, 2 - 43010 Fontevivo PR - VAT: IT02498250345 - TEL: +39 0521 680111 - FAX: +39 0521 610701 - UNIQUE CODE: T180WIO

The technical data on this website are not binding and may be changed without advanced notice.

Last update: 08 April 2020