

ViewSonic  LCD DISPLAY
VX3268-2KPC-MHD


Key Features

- 1500R curved screen for a perfect balance of immersion and comfort
- 144Hz refresh rate ensures clarity in motion
- 1ms (MPRT) response time ensures smooth images
- AMD FreeSync™ Premium prevents screen tearing
- QHD 1440p resolution for clear detail



Product Description

With an ultimate immersive curved screen and 144Hz refresh rate, the ViewSonic VX3268-2KPC-MHD provides a stunning viewing experience. The monitor has been designed with a 1500R curved and borderless panel for an immersive experience. A high 144Hz refresh rate delivers clarity in motion while AMD FreeSync™ Premium, virtually eliminates screen tearing and stuttering for a fluid gaming experience. With 1ms MPRT response time, the monitor delivers smooth images without ghosting. The VX3268-2KPC-MHD is also equipped with ViewSonic's exclusive ViewMode™ presets, which offer user-customized game modes, including FPS, RTS and MOBA game settings. In addition, a DisplayPort and two HDMI inputs offer flexible connectivity for gameplay.

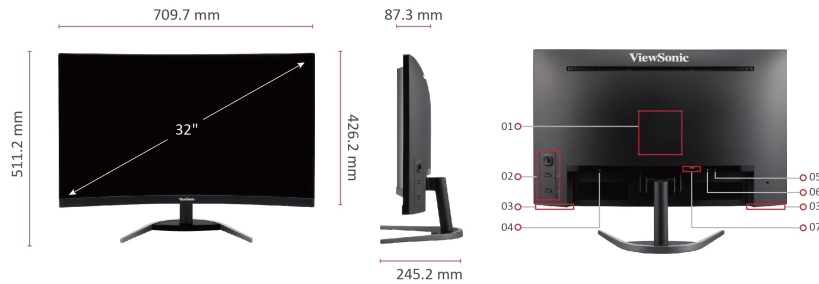

- 1. VESA Compatible(Wall Mount 100 x 100mm)
- 2. Menu Controls
- 3. Internal Speakers
- 4. AC In
- 5. Audio Out
- 6. DisplayPort
- 7. HDMI x 2

Visit Us  www.viewsonic.com

DISPLAY

Display Size (in.):	32
Viewable Area (in.):	31.5
Panel Type:	VA Technology
Resolution:	2560 x 1440
Resolution Type:	QHD
Static Contrast Ratio:	3,000:1 (typ)
Dynamic Contrast Ratio:	80M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (MPRT):	1ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	1500R
Refresh Rate (Hz):	144
Adaptive Sync:	FreeSync
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 85% size (Typ), sRGB: 120% size (Typ)
Pixel Size:	0.272 mm (H) x 0.272 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	2560x1440
Mac® Resolution (max):	2560x1440
PC Operating System:	Windows 10 certified; macOS tested
Mac® Resolution (min):	2560x1440

CONNECTOR

3.5mm Audio Out:	1
HDMI 2.0:	2
Display Port:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	33W
Eco Mode (optimized):	38W
Consumption (typical):	42W
Consumption (max):	56W
Voltage:	AC 100-240V, 50/60 Hz
Stand-by:	0.5W
Power Supply:	Internal

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Joystick key: Up, Right, Down, Left, Center; Key 1 (favorite); Key 2 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	30 ~ 255KHz
Frequency Vertical:	48 ~ 144Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.2)
---------------	--

ERGONOMICS

Tilt (Forward/Back):	-3° / 21°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	15.6
Net Without Stand (lbs):	14
Gross (lbs):	21.1

WEIGHT (METRIC)

Net (kg):	7.1
Net Without Stand (kg):	6.3
Gross (kg):	9.6

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	31.5 x 20.7 x 7.3
Physical (in.):	27.9 x 20.1 x 9.7
Physical Without Stand (in.):	27.9 x 16.8 x 3.4

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	800 x 526 x 186
Physical (mm):	710 x 511 x 245
Physical Without Stand (mm):	710 x 426 x 87

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, CEC, S-mark, MX-CoC, Mexico Energy, BSMI
PACKAGE CONTENTS:	VX3268-2KPC-MHD x1, 3-pin Plug (IEC C13 / CEE22) x1, DisplayPort Cable (v1.2; Male-Male) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Country Of Origin:	24