



LED DISPLAY

VA2432-h


Key Features

- HDMI and VGA Input
- SuperClear® IPS Technology for rich colors at wide angles
- 75Hz Refresh rate delivers fluid visuals
- Eye-Care technology for comfortable viewing
- Eco-mode for low energy consumption



Product Description

The ViewSonic VA2432-h is a 24" Full HD IPS monitor with HDMI and VGA input for business or home usage. With SuperClear® IPS technology and Full HD resolution, images are clear and detailed from a wide range of viewing angles. The VA2432-h's three-sided frameless bezel design delivers a seamless viewing experience. This monitor provides six ViewMode presets that deliver optimized screen performance in different applications. Eye-Care technology and energy-saving Eco mode help to eliminate eye strain from extended viewing periods. With VESA-compatible mount support, this monitor is easy to setup in any environment.

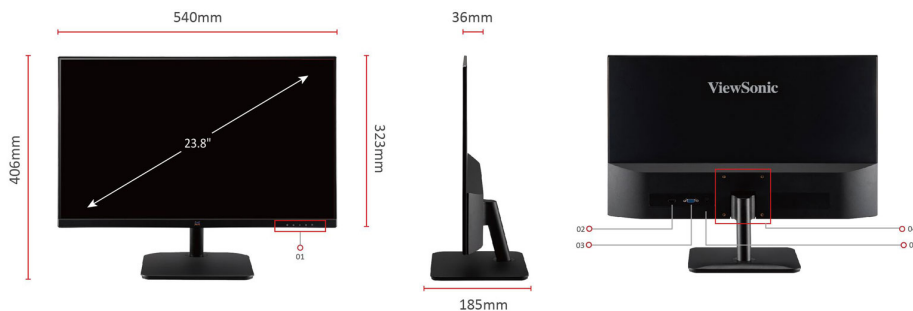

1. Menu Control Panel
2. HDMI
3. VGA
4. VESA Compatible (Wall Mount 75x75mm)
5. AC IN

Visit Us ■ www.viewsonic.com

DISPLAY

Display Size (in.):	24
Viewable Area (in.):	23.8
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + Hi-FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ), sRGB: 104% size (Typ)
Pixel Size:	0.275 mm (H) x 0.275 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

VGA:	1
HDMI 1.4:	1
Power in:	External power adapter

AUDIO**POWER**

Eco Mode (Conserve):	15W
Eco Mode (optimized):	18W
Consumption (typical):	22W
Consumption (max):	24W
Voltage:	AC 100-240V, 50/60 Hz
Stand-by:	0.3W
Power Supply:	External

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	75 x 75 mm
------------------	------------

INPUT SIGNAL

Frequency Horizontal:	24 ~ 86KHz
Frequency Vertical:	48 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4)
Analog Sync:	Separate - RGB Analog

ERGONOMICS

Tilt (Forward/Back):	-3° / 20°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	6
Net Without Stand (lbs):	5.3
Gross (lbs):	8.2

WEIGHT (METRIC)

Net (kg):	2.7
Net Without Stand (kg):	2.4
Gross (kg):	3.7

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	23.6 x 15.6 x 4.4
Physical (in.):	21.3 x 16 x 7.3
Physical Without Stand (in.):	21.3 x 12.7 x 1.4

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	600 x 395 x 112
Physical (mm):	540 x 406 x 185
Physical Without Stand (mm):	540 x 322 x 36

GENERAL

Regulations:	RoHS, WEEE, BSMI, BIS
PACKAGE CONTENTS:	VA2432-H x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x2
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market