




F110 FULLY RUGGED TABLET

- 11th Generation Intel[®] Core[™] i7 / i5 vPro[™] Processor
- Thunderbolt™ 4 Brings Lightning Speed and Performance
- Enhanced Enterprise Security with Optional Intel[®] vPro[™], Windows Hello Face-authentication Camera, TPM 2.0 and Many More Multi-Factor Authentication Options
- Configurable Options to Fit Diverse Data Collection Needs: Optional 1D/2D Imager Barcode Reader / USB 2.0 Port / Serial Port + LAN
- LifeSupport[™] Battery Swappable Technology

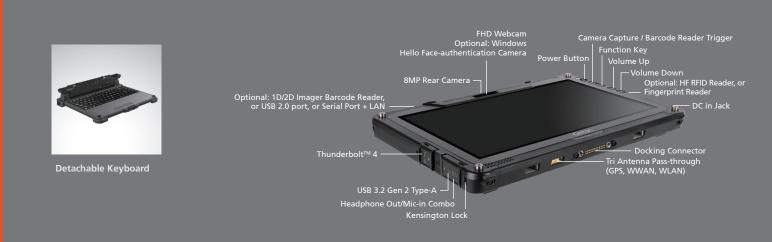

Specifications

Generation G6

Operating System Windows 10 Pro

Mobile Computing Platform

Intel® Core™ i5-1135G7 Processor Max. 4.2GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Platform Options: Intel® Core™ i5-1145G7 vPro™ Processor Max. 4.4GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor Max. 4.7GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache Intel® Core™ i7-1185G7 vPro™ Processor Max. 4.8GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

VGA Controller

Intel® Iris® Xe Graphics

Display

11.6" IPS TFT LCD FHD (1920 x 1080) Protection film 1000 nits LumiBond[®] display with Getac sunlight readable technology Capacitive multi-touch screen

Storage & Memory

8GB DDR4 Optional: 16GB / 32GB DDR4 256GB PCIe NVMe SSD Optional: 512GB / 1TB PCIe NVMe SSD

Keyboard

Power button 4 tablet programmable buttons

Pointing Device

Touchscreen

- Capacitive multi-touch screen - Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader, or USB 2.0 port, or serial port + LAN (RJ45)⁺ Optional[®]: HF RFID Reader, or Fingerprint Reader Optional: Smart Card Reader

I/O Interface

FHD webcam x 1 " FHD webcam x 1 [™] 8M pixels auto focus rear camera x 1 Headphone Out/Mic-in Combo x 1 DC in Jack x 1 Thunderbolt™ 4 Type-C x 1 USB 3.2 Gen 2 Type-A x 1 Docking Connector x 1 Optional: Windows Hello face-authentication camera (front-facing) x 1 [™] Optional: RF antenna pass-through for GPS, WLAN and WWAN

Communication Interface

Intel[®] Wi-Fi 6 AX201, 802.11ax Bluetooth (v5.2) * Optional: Dedicated GPS Optional: 4G LTE mobile broadband with integrated GPS Optional: 10/100/1000 base-T Ethernet (occupies expansion slot)

Security Feature

TPM 2.0

- Kensington Lock Optional: Intel[®] vPro™ Technology Optional: Windows Hello face-authentication
- camera (front-facing) x 1 ⁱⁱⁱ Optional: HF RFID Reader ^{vi, ii}, or Smart Card Reader, or Fingerprint Reader ⁱⁱ

Power

AC Adapter (90W, 100-240VAC, 50 / 60Hz) Li-lon smart battery (11.4V, typical 2680mAh; min. 2640mAh) x 2

LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight 314 x 207 x 25mm (12.4" x 8.15" x 0.98") 1.52kg (3.35lbs) ^{vii}

Rugged Feature MIL-STD-810H certified IP66 certified MIL-STD-461G certified viii Vibration & 6 feet (1.8m) drop resistant e-Mark certified for vehicle usage Optional: ANSI/UL 121201, CSA C22.2 NO. 213

Environmental Specification

Temperature * Operating: -29°C to 63°C / -20°F to 145°F Storage: -51°C to 71°C / -60°F to 160°F Humidity

95% RH, non-condensing

Pre-installed Software

Getac Utility Getac Camera Getac Geolocation Getac Barcode Manager ^v Optional: Absolute Persistence® Accessorie

Battery (11.4V, typical 2680mAh; min. 2640mAh) AC Adapter (90W, 100-240VAC, 50 / 60Hz) Capacitive Stylus

Optional:

Carry Bag High-Capacity Battery (11.1V, typical 4200mAh; min.4080mAh) MIII.4080/MAN) Multi-Bay Charger (Dual Bay) Multi-Bay Charger (Eight-Bay) Detachable Keyboard 100W Type-C AC Adapter Office Dock AC Adapter (90W, 100-240VAC) MIL-STD-461 Certified AC Adapter (90W, 415-2304/AC) 115-230VAC) Vehicle Adapter (120W, 11-32VDC) Digitizer Pen Protection Film Hand Strap Shoulder Strap (2-point) Shoulder Harness (4-point; handsfree) Vehicle Cradle Vehicle Dock

Office Dock **Bumper-to-Bumper Warranty**

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days Standard

3 years Bumper-to-Bumper

- Barcode reader, USB 2.0 port, or serial port + LAN are mutually exclusive options. HF RFID reader and fingerprint reader are
- ii
- mutually exclusive options. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are iii
- mutually exclusive options. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- Available when barcode reader option is selected
- 13.56MHz Contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ . compliant).
- vii Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 6mm (H), 0.24kg. viii MIL-STD-461 90W AC adapter sold separately.
- Available with limited configurations. Tested by an independent third-party test lab following MIL-STD-810H.

Fully Rugged **Tablet**



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (GPS, WWAN, WLAN)	



Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel : +44 (0) 1952 207 222 Sales-Getac-UK@getac.com | en.getac.com



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved tion provided herewith is for reference only available specification shall be subjected to quotation by request. V01M06Y21UK