

# Fujitsu PRIMERGY RX2530 M6 server Rack (1U) Intel Xeon Silver 4314 2.4 GHz 16 GB DDR4-SDRAM 900 W



**Brand :** Fujitsu


**Product family:** PRIMERGY

**Product code:**  
VFY:R2536SC220IN

**Product name :** RX2530 M6

- No OS  
 - Intel Xeon Silver 4314 (24MB Cache, 2.4GHz)  
 - 16GB (3200MHz) DDR4-SDRAM (1 x 16)  
 Intel Xeon Silver 4314 (24MB Cache, 2.4GHz), 16GB DDR4-SDRAM (3200MHz), 900W, No OS  
 Fujitsu PRIMERGY RX2530 M6. Processor family: Intel Xeon Silver, Processor frequency: 2.4 GHz,  
 Processor model: 4314. Internal memory: 16 GB, Internal memory type: DDR4-SDRAM, Memory layout  
 (slots x size): 1 x 16 GB. Power supply: 900 W. Chassis type: Rack (1U)

Processor		Ports & interfaces	
Processor manufacturer *	Intel	VGA (D-Sub) ports quantity	1
Processor family *	Intel Xeon Silver	<b>Design</b>	
Processor generation	3rd Generation Intel® Xeon® Scalable	Chassis type *	Rack (1U)
Processor model *	4314	Rack mounting	✓
Processor frequency *	2.4 GHz	<b>Performance</b>	
Processor boost frequency	3.4 GHz	Trusted Platform Module (TPM)	✓
Processor cores	16	Trusted Platform Module (TPM) version	2.0
Processor cache	24 MB	<b>Software</b>	
Number of processors installed	1	Operating system installed *	✗
<b>Memory</b>		Windows Server 2019 Datacenter Windows Server 2019 Standard Windows Server 2019 Essentials Hyper-V Server 2016 Windows Server 2016 Datacenter Windows Server 2016 Standard Windows Server 2016 Essentials Windows Storage Server 2016 Standard SUSE® Linux Enterprise Server 12 Red Hat® Enterprise Linux 8 Red Hat® Enterprise Linux 7 Oracle® Linux 7	
Internal memory *	16 GB	Compatible operating systems *	
Internal memory type *	DDR4-SDRAM		
Memory slots	32x DIMM		
Memory clock speed	3200 MHz		
Memory layout (slots x size)	1 x 16 GB		
Maximum internal memory *	10 TB		
<b>Storage</b>		<b>Power</b>	
Number of HDDs supported	8	Power supply *	900 W
Supported HDD sizes	2.5"	<b>Operational conditions</b>	
RAID support *	✓	Operating temperature (T-T)	0 - 35 °C
Hot-Plug support	✓	Operating relative humidity (H-H)	10 - 85%
Optical drive type *	✗	<b>Weight &amp; dimensions</b>	
<b>Ports &amp; interfaces</b>		Width	482.2 mm
Ethernet LAN (RJ-45) ports *	1	Depth	807.5 mm
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	5	Height	42.7 mm
		Weight	18.2 kg

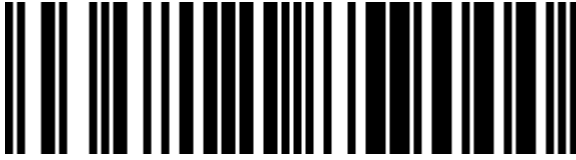

4065221859000

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 04-APR-2024. Prints or copies of Information are only valid on the printed Publication date