

# Fujitsu PRIMERGY RX2540 M6 server Rack (2U) Intel Xeon Silver 4309Y 2.8 GHz 16 GB DDR4-SDRAM 900 W

**Brand :** Fujitsu

**Product family:** PRIMERGY

**Product code:**  
VFY:R2546SC251IN

**Product name :** RX2540 M6

- No OS

- Intel Xeon Silver 4309Y (12MB Cache, 2.8GHz)

- 16GB (3200MHz) DDR4-SDRAM (1 x 16)

Intel Xeon Silver 4309Y (12MB Cache, 2.8GHz), 16GB DDR4-SDRAM (3200MHz), 900W, No OS


Fujitsu PRIMERGY RX2540 M6. Processor family: Intel Xeon Silver, Processor frequency: 2.8 GHz,

Processor model: 4309Y. Internal memory: 16 GB, Internal memory type: DDR4-SDRAM, Memory layout

(slots x size): 1 x 16 GB. Power supply: 900 W. Chassis type: Rack (2U)



| Processor                       |                                      | Ports & interfaces   |                                |
|---------------------------------|--------------------------------------|--|--------------------------------|
| Processor manufacturer *        | Intel                                | Ethernet LAN (RJ-45) ports *   | 1                              |
| Processor family *              | Intel Xeon Silver                    | USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity  | 6                              |
| Processor generation            | 3rd Generation Intel® Xeon® Scalable | VGA (D-Sub) ports quantity   | 1                              |
| Processor model *               | 4309Y                                | Design   |                                |
| Processor frequency *           | 2.8 GHz                              | Chassis type *   | Rack (2U)                      |
| Processor boost frequency       | 3.6 GHz                              | Rack mounting  | ✓                              |
| Efficient-core base frequency   | 0.0028 GHz                           | Performance  |                                |
| Performance-core base frequency | 2.8 GHz                              | Trusted Platform Module (TPM)  | ✓                              |
| Processor cores                 | 8                                    | Trusted Platform Module (TPM) version  | 2.0                            |
| Processor cache                 | 12 MB                                | Software   |                                |
| Memory                          |                                      | Operating system installed *   | ✗                              |
| Internal memory *               | 16 GB                                | Compatible operating systems *   | Windows Server 2019 Datacenter |
| Internal memory type *          | DDR4-SDRAM                           |  | Windows Server 2019 Standard   |
| Memory slots                    | 32x DIMM                             |  | Windows Server 2019 Essentials |
| ECC                             | ✓                                    |  | Hyper-V Server 2016 Windows    |
| Memory clock speed              | 3200 MHz                             |  | Server 2016 Datacenter Windows |
| Memory layout (slots x size)    | 1 x 16 GB                            |  | Server 2016 Standard Windows   |
| Maximum internal memory *       | 12 TB                                | Server 2016 Essentials Windows   |                                |
|                                 |                                      | Storage Server 2016 Standard Red Hat® Enterprise Linux 8 Red Hat® Enterprise Linux 7 Oracle® Linux 7 |                                |
| Storage                         |                                      | Power  |                                |
| Number of HDDs supported        | 24                                   | Power supply *   | 900 W                          |
| Supported HDD sizes             | 2.5"                                 | Weight & dimensions  |                                |
| RAID support *                  | ✓                                    | Width  | 482.5 mm                       |
| Hot-Plug support                | ✓                                    | Depth  | 800 mm                         |
| Optical drive type *            | ✗                                    | Height   | 86.9 mm                        |
|                                 |                                      | Weight   | 32 kg                          |

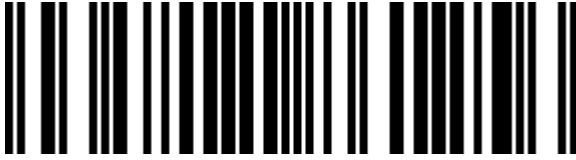

4065221861256

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 03-APR-2024. Prints or copies of Information are only valid on the printed Publication date