



## ASUS ZenWiFi XD4 Plus (B-3-PK) Dual-band (2.4 GHz / 5 GHz) Wi-Fi 6 (802.11ax) Black 2 Internal

Brand : ASUS


Product code: 90IG07M0-MO3C50

Product name : ZenWiFi XD4 Plus (B-3-PK)



ZenWiFi XD4 Plus 3 Pack AX1800 Whole-Home Mesh WiFi 6 System (up to 445m<sup>2</sup> coverage, AiMesh, AiProtection, wall mounting, app control) black  
ASUS ZenWiFi XD4 Plus (B-3-PK). Product colour: Black, Antenna type: Internal, Product type: Mesh router. Wi-Fi band: Dual-band (2.4 GHz / 5 GHz), Top Wi-Fi standard: Wi-Fi 6 (802.11ax), Wi-Fi standards: 802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax). Internal memory: 256 MB, Flash memory: 128 MB, Parental control features: Time controls. AC adapter input voltage: 110 - 240 V, AC adapter frequency: 50 - 60 Hz, AC adapter output voltage: 12 V. Number of products included: 3 pc(s), Number of adapters included: 3 pc(s)

Design		Features	
Product type	Mesh router	Internal memory	256 MB
Product colour *	Black	Flash memory	128 MB
LED indicators	Power	Quality of Service (QoS) support	✓
Antenna type *	Internal	Port forwarding	✓
Antennas quantity	2	Parental control	✓
Maximum coverage	445.93 m <sup>2</sup>	Parental control features	Time controls
Reset button	✓	Works with Amazon Alexa	✓
<b>Wireless LAN features</b>		SSID Broadcast	✓
Wi-Fi band *	Dual-band (2.4 GHz / 5 GHz)	MIMO	✓
Top Wi-Fi standard *	Wi-Fi 6 (802.11ax)	<b>Protocols</b>	
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax)	DHCP server	✓
WLAN data transfer rate (first band)	574 Mbit/s	<b>Ports &amp; interfaces</b>	
WLAN data transfer rate (second band)	1201 Mbit/s	Ethernet LAN (RJ-45) ports *	2
Networking standards	IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n	Ethernet WAN	✓
Security algorithms	WPA, WPA2, WPA3	DC-in jack	✓
Point-to-point protocol over Ethernet (PPPoE)	✓	<b>Power</b>	
Static IP	✓	AC adapter input voltage	110 - 240 V
IGMP snooping	✓	AC adapter frequency	50 - 60 Hz
Dynamic DNS (DDNS)	✓	AC adapter output voltage	12 V
Guest access	✓	AC adapter output current	1.5 A
VPN support	VPN Client L2TP VPN Client OVPN VPN Client PPTP VPN Server IPsec VPN Server OVPN VPN Server PPTP	<b>Packaging content</b>	
		Number of products included	3 pc(s)
		AC adapter included	✓
		Number of adapters included	3 pc(s)
		Ethernet cable	✓

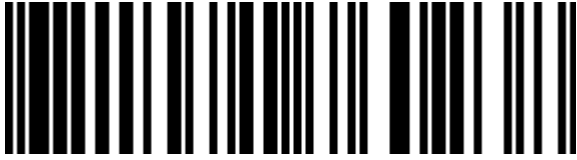

4711081760238

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 01-JUN-2023. Prints or copies of Information are only valid on the printed Publication date