



AVer VB350 Pro Black 60 fps

Brand : AVer

Product code: 61U3210000AC

Product name : VB350 Pro




- 4K 3X optical zoom lens with 15X zoom
- Beamforming technology
- Auto framing
- Smart Gallery
- AVer Audio Fence
- Audio Tracking

100V-240V, 50/60 Hz, 12V/5A, USB, 738 x 127 x 116 mm, 3100 g

AVer VB350 Pro. HD type: 4K Ultra HD, Maximum frame rate: 60 fps. Field of view (FOV) angle: 92°, Optical zoom: 3x, Digital zoom: 15x. Product colour: Black



Camera		Operational conditions	
Zoom capability	✓	Operating relative humidity (H-H)	20 - 80%
Optical zoom	3x	Storage relative humidity (H-H)	20 - 80%
Digital zoom	15x	Packaging content	
Field of view (FOV) angle	92°	Remote control included	✓
White balance	Auto, Manual	Cables included	AC, USB
Closest focusing distance	0.8 m	Warranty card	✓
Back Light Compensation (BLC)	✓	Mounting kit	✓
Video		Velcro cable strap	✓
HD type *	4K Ultra HD	Packaging content	QR code card
Maximum frame rate *	60 fps	System requirements	
Video formats supported	H.264, H.265, M-JPEG, YUV, YUY2	Windows operating systems supported	Windows 10, Windows 11, Windows 7
Supported graphics resolutions	480 x 360, 640 x 360, 640 x 480 (VGA), 800 x 448, 800 x 600 (SVGA), 848 x 480, 960 x 540, 1280 x 720 (HD 720), 1280 x 960, 1600 x 900, 1920 x 1080 (HD 1080)	Mac operating systems supported	✓
Design		Audio	
Product colour *	Black	Built-in microphone	✓
Tilt angle range	105 - 105°	Built-in speaker(s)	✓
Pan range	180 - 180°	Echo cancellation	✓
Ports & interfaces		Noise reduction	✓
HDMI ports quantity	1	Weight & dimensions	
USB 2.0 ports quantity	2	Remote control dimensions (W x H x D)	149.7 x 19.3 x 42.3 mm
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	1	Remote control weight	50 g
Ethernet LAN (RJ-45) ports	2	Width	738 mm
Headphone out	✓	Depth	116 mm
Power		Height	127 mm
Power source type	AC	Weight	3.1 kg
AC input voltage	100 - 240 V	Packaging data	
DC input voltage	50 / 60 V	Package width	872 mm
Operating voltage	12 V	Package depth	260 mm
Operating current	5 A	Package height	197 mm
Operational conditions		Package weight	13.8 kg
Operating temperature (T-T)	0 - 40 °C		
Storage temperature (T-T)	-20 - 60 °C		

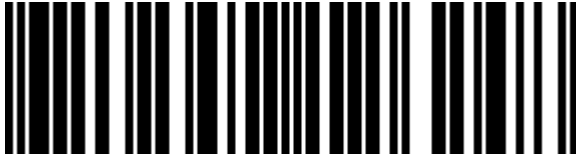

4719552126248

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 12-APR-2024. Prints or copies of Information are only valid on the printed Publication date