



# ASUS Chromebook CX1102CKA-N00001 29.5 cm (11.6") HD Intel® Celeron® N N4500 4 GB LPDDR4x-SDRAM 64 GB eMMC Wi-Fi 6 (802.11ax) ChromeOS Silver

**Brand :** ASUS

**Product family:** Chromebook

**Product code:** 90NX05N1-M00020

**Product name :** CX1102CKA-N00001



- ChromeOS
  - Intel Celeron N4500 (4MB Cache, 1.1GHz)
  - 29.5 cm (11.6") HD 1366 x 768 TN
  - 4GB LPDDR4x-SDRAM & 64GB eMMC
- Intel Celeron N4500 (4MB Cache, 1.1GHz), 4GB LPDDR4x-SDRAM, 64GB eMMC, 29.5 cm (11.6") HD 1366 x 768 TN, Intel UHD Graphics, WLAN, Webcam, ChromeOS

ASUS Chromebook CX1102CKA-N00001 29.5 cm (11.6") HD Intel® Celeron® N N4500 4 GB LPDDR4x-SDRAM 64 GB eMMC Wi-Fi 6 (802.11ax) ChromeOS Silver:

## Get more done every day, from anywhere

ASUS Chromebook CX1 is made for boosting productivity and having more fun while on the move — all day, every day. This lightweight, ultraportable device is powered by up to a quad-core Intel® processor, has WiFi 6 technology for ultrafast connectivity and gives you the freedom of up to 10-hour battery life<sup>1</sup>. The compact chassis offers the capability for easy multitasking and incredibly immersive entertainment, and the device is your gateway to the best of Google — including the rich library of apps for work or play found on Google Play<sup>2</sup>. With smooth performance, robust security and convenient features, ASUS Chromebook CX1 is ideal for anyone on the go!




Design		Ports & interfaces	
Colour name	Transparent Silver	USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity *	2
Product type *	Chromebook	Combo headphone/mic port	✓
Product colour *	Silver	Charging port type	USB Type-C
Form factor *	Clamshell	USB Type-C DisplayPort Alternate Mode	✓
Housing material	Plastic	USB Power Delivery	✓
Market positioning	Home	Keyboard	
Country of origin	China	Pointing device	Touchpad
Display		Numeric keypad *	✗
Display diagonal *	29.5 cm (11.6")	Software	
Display resolution *	1366 x 768 pixels	Operating system installed *	ChromeOS
Touchscreen *	✗	Processor special features	
HD type	HD	Intel Stable Image Platform Program (SIPP)	✗
Panel type	TN	Intel 64	✓
LED backlight	✓	Execute Disable Bit	✓
Native aspect ratio	16:9	Idle States	✓
Anti-glare screen	✓	CPU configuration (max)	1
Display brightness	220 cd/m <sup>2</sup>	Embedded options available	✓
RGB colour space	NTSC	Intel Virtualization Technology for Directed I/O (VT-d)	✓
Colour gamut	45%	Intel Smart Idle Technology	✗
Maximum refresh rate	60 Hz	Intel Secure Boot	✓
Contrast ratio (typical)	500:1	Intel Identity Protection Technology version	1.00
Processor		Intel Secure Boot Technology version	1.00
Processor manufacturer *	Intel	Intel Secure Key Technology version	1.00
Processor family *	Intel® Celeron® N		
Processor model *	N4500		
Processor frequency *	1.1 GHz		
Processor cores	2		
Processor cache	4 MB		

<b>Memory</b>		<b>Processor special features</b>	
Internal memory *	4 GB	Intel Virtualization Technology (VT-x)	✓
Internal memory type	LPDDR4x-SDRAM	Intel Rapid Storage Technology	✗
Memory form factor	On-board	Conflict-Free processor	✓
Maximum internal memory *	4 GB		
<b>Storage</b>		<b>Battery</b>	
Total storage capacity *	64 GB	Battery technology	Lithium-Ion (Li-Ion)
Storage media *	eMMC	Number of battery cells	2
Optical drive type *	✗	Battery capacity *	42 Wh
Card reader integrated	✓		
Compatible memory cards	MicroSD (TransFlash)	<b>Power</b>	
<b>Graphics</b>		AC adapter power	45 W
Discrete graphics card model *	Not available	AC adapter frequency	50/60 Hz
On-board graphics card *	✓	AC adapter input voltage	100 - 240 V
Discrete graphics card *	✗	AC adapter output current	3 A
On-board graphics card model *	Intel® UHD Graphics	AC adapter output voltage	15 V
<b>Audio</b>		<b>Security</b>	
Built-in microphone	✓	Cable lock slot	✓
		Cable lock slot type	Kensington
<b>Camera</b>		<b>Weight &amp; dimensions</b>	
Front camera	✓	Width	292 mm
Front camera HD type	HD	Depth	205.3 mm
		Height	18.8 mm
		Weight *	1.21 kg
<b>Network</b>		<b>Packaging data</b>	
Top Wi-Fi standard *	Wi-Fi 6 (802.11ax)	Package width	328 mm
Wi-Fi standards	Wi-Fi 6 (802.11ax)	Package depth	386 mm
Mobile network connection *	✗	Package height	250 mm
Antenna type	2x2	Package weight	1.99 kg
Ethernet LAN	✗		
Bluetooth	✓	<b>Technical details</b>	
Bluetooth version	5.2	Commodity Classification Automated Tracking System (CCATS)	8471300000
<b>Ports &amp; interfaces</b>			
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity *	2		



4711387177600

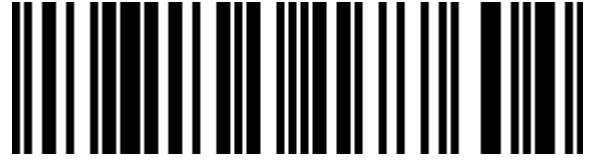

0197105177604



197105177604

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.