



POLY Studio X70 20 MP Black, Grey 3840 x 2160 pixels 30 fps



Brand : POLY

Product code: 83Z51AA

Product name : Poly Studio X70

Poly Studio X70 All-In-One Video Bar


POLY Studio X70 20 MP Black, Grey 3840 x 2160 pixels 30 fps:

Enable meeting equality

The Poly Studio X70, all-in-one video bar, offers quality audio and video performance in large meeting spaces. Enjoy pinpoint-accurate automatic framing and tracking modes, distraction-free audio technology, and lifelike 4K UltraHD video.

POLY Studio X70. Megapixel (approx.): 20 MP. HD type: 4K Ultra HD, Maximum video resolution: 3840 x 2160 pixels, Supported video modes: 2160p, Maximum frame rate: 30 fps. Digital zoom: 7.3x. Wi-Fi, Bluetooth. Product colour: Black, Grey


Camera		Operational conditions	
Megapixel (approx.) *	20 MP	Storage temperature (T-T)	-40 - 70 °C
Second camera resolution	20 MP	Operating relative humidity (H-H)	15 - 80%
Zoom capability	✓	Storage relative humidity (H-H)	5 - 95%
Digital zoom	7.3x	Operating altitude	0 - 4877 m
Horizontal field of view (wide)	120°	Packaging content	
Video		Cables included	HDMI, LAN (RJ-45)
HD type *	4K Ultra HD	Mounting kit	✓
Maximum video resolution *	3840 x 2160 pixels	AC adapter included	✓
Maximum frame rate *	30 fps	Performance	
Supported video modes	2160p	Wi-Fi	✓
Video formats supported	AVC, H.264, H.265	Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac)
Supported graphics resolutions	1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1400 x 1050 (SXGA+), 1680 x 1050 (WSXGA+), 1920 x 1080 (HD 1080), 1920 x 1200 (WUXGA), 3840 x 2160	Bluetooth	✓
Design		Bluetooth version	5.0
Product colour *	Black, Grey	Cable lock slot	✓
Ports & interfaces		Cable lock slot type	Kensington
HDMI ports quantity	3	Audio	
HDMI version	1.4	Built-in microphone	✓
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity	1	Number of microphones	2
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	2	Built-in speaker(s)	✓
Ethernet LAN (RJ-45) ports	2	Weight & dimensions	
Operational conditions		Width	840.2 mm
Operating temperature (T-T)	0 - 40 °C	Depth	135.4 mm
		Height	117.3 mm
		Weight	3.2 kg

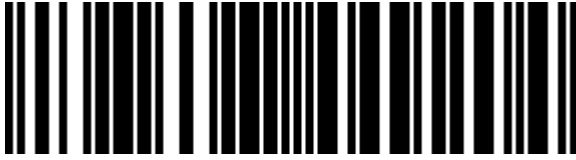

0197497449204




197497449204

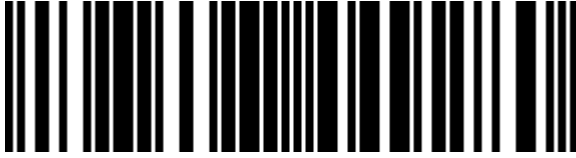

0197497449280



197497449280

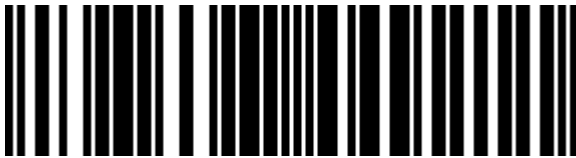

0197497449211



197497449211



0197497449259



197497449259

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.