

## Lindy 43389 interface hub USB 3.2 Gen 1 (3.1 Gen 1) Type-A 5000 Mbit/s Black, Grey

**Brand :** Lindy

**Product code:** 43389

**Product name :** 43389

10m USB 3.0 Hub 4 Ports


Lindy 43389 interface hub USB 3.2 Gen 1 (3.1 Gen 1) Type-A 5000 Mbit/s Black, Grey:

The Lindy 10m USB 3.0 Hub uses built-in active electronics to extend the cable length of up to four USB devices by an additional 10m. It provides 2 USB Type A and 2 USB Type C SuperSpeed ports for connecting up to 4 peripherals such as storage devices, printers or webcams to a USB Type A equipped computer at longer distances, while also ensuring flexible positioning. Capable of data transfer speeds of up to 5Gbps, the hub is also backwards compatible with USB 2.0 and 1.1.

The hub is powered by the USB Bus, while it also features a DC socket for connecting an external 5VDC power supply (not included) when using USB peripherals which have higher power requirements. With 'Plug and Play' installation, no drivers are required, therefore this hub can be installed with minimum difficulty.



Ports & interfaces		Weight & dimensions	
Host interface *	USB 3.2 Gen 1 (3.1 Gen 1) Type-A	Height	14 mm
Hub interfaces *	USB 3.2 Gen 1 (3.1 Gen 1) Type-A, USB 3.2 Gen 1 (3.1 Gen 1) Type-C	Weight	544 g
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	2	<b>Packaging data</b>	
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity	2	Quantity per pack	1 pc(s)
Ports quantity *	4	Package width	236 mm
DC-in jack	✓	Package depth	255 mm
<b>Features</b>		Package height	60 mm
Data transfer rate *	5000 Mbit/s	Package weight	600 g
Product colour	Black, Grey	Package type	Polybag
Housing material	Aluminium, Plastic	<b>Operational conditions</b>	
Cable length	10 m	Maximum operating temperature	45 °C
<b>Power</b>		Operating temperature (T-T)	0 - 45 °C
Input voltage	5 V	Operating temperature (T-T)	32 - 113 °F
Input current	0.9 A	Storage temperature (T-T)	-20 - 70 °C
<b>Weight &amp; dimensions</b>		Operating relative humidity (H-H)	0 - 40%
Width	52.5 mm	<b>Sustainability</b>	
Depth	52.5 mm	Sustainability compliance	✓
		Sustainability certificates	CE, Federal Communications Commission (FCC), REACH, RoHS, UKCA

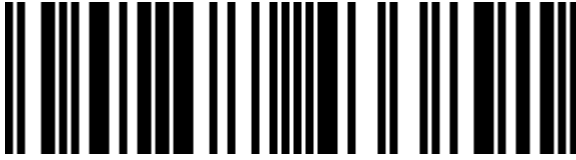

4002888433891

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 01-FEB-2024. Prints or copies of Information are only valid on the printed Publication date