

## Lexmark 2581n+ dot matrix printer 240 x 144 DPI 618 cps

**Brand :** Lexmark


**Product code:** 11C2954

**Product name :** 2581n+



9-pin dot matrix, 240 x 144, 12500 POH, 512 KB, 55 cps, 57 dBA, 9.8 kg, white  
 Lexmark 2581n+. Maximum print speed: 618 cps, Maximum resolution: 240 x 144 DPI, Maximum print speed (draft): 400 cps. Cut sheet width range: 76 - 420 mm, Cut sheet length range: 76 - 559 mm, Continuous paper width range: 76 - 406 mm. Product colour: White, Buffer size: 512 KB, Sound pressure level (printing): 57 dB. Standard interfaces: Ethernet, USB, Optional connectivity: Ethernet. Print head: 9-pin, Print head life: 300 million characters, Ribbon life: 8 million characters

Printing		Endurance	
Maximum resolution *	240 x 144 DPI	Print head *	9-pin
Maximum printing width (columns) *	420	Print head life	300 million characters
Colour *	✗	Ribbon life	8 million characters
Maximum print speed *	618 cps	Mean time between failures (MTBF)	12500 h
Maximum print speed (draft)	400 cps	<b>Operational conditions</b>	
Maximum print speed (LQ)	100 cps	Operating temperature (T-T)	10 - 40 °C
Character pitch	10,12,15,17.1,20 cpi	Operating relative humidity (H-H)	8 - 90%
Built-in barcodes	CODABAR (NW-7), Code 39, EAN13, EAN8, Industrial 2/5, Interleaved 2/5, POSTNET, UPC-A, UPC-E	<b>System requirements</b>	
<b>Paper handling</b>		Windows operating systems supported	✓
Cut sheet width range	76 - 420 mm	Linux operating systems supported	✓
Cut sheet length range	76 - 559 mm	Server operating systems supported	Windows Server 2003, Windows Server 2003 x64, Windows Server 2008, Windows Server 2008 R2, Windows Server 2008 x64
Continuous paper width range	76 - 406 mm	<b>Weight &amp; dimensions</b>	
Continuous paper length range	76 - 559 mm	Width	634 mm
<b>Features</b>		Depth	290 mm
Product colour *	White	Height	195 mm
Buffer size *	512 KB	Weight	9.8 kg
Sound pressure level (printing) *	57 dB	<b>Packaging data</b>	
Page description languages *	Epson ESC/P2, Epson FX, OKI ML, PPDS	Package width	751 mm
Noise level (idle)	15 dB	Package depth	408 mm
Certification	UL 60950-1, CSA, FCC Class B, CB IEC 60950-1, SEMKO, GS (TÜV), CE Class B, SMA C-Tick	Package height	325 mm
<b>Ports &amp; interfaces</b>		<b>Other features</b>	
Standard interfaces *	Ethernet, USB	Print technology	Dot matrix
Optional connectivity	Ethernet	Network ready	✓

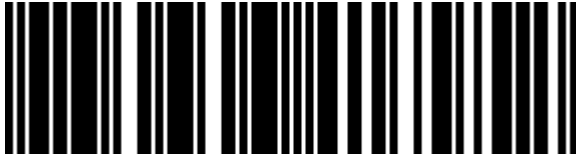

0734646417952



734646417952

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 16-APR-2024. Prints or copies of Information are only valid on the printed Publication date