



APC Smart-UPS Line-Interactive 0.62 kVA 390 W 4 AC outlet(s)

Brand : APC

Product code: SC6201

Product name : Smart-UPS

APC Smart-UPS SC, 620VA/390W, Input 230V/Output 230V, Interface Port DB-9 RS-232
APC Smart-UPS. UPS topology: Line-Interactive, Output power capacity: 0.62 kVA, Output power: 390 W.
AC outlet types: C13 coupler, Power plug: C14 coupler, AC outlets quantity: 4 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 132 VAh, Typical backup time at full load: 5.5 min. Form factor: Tower, Product colour: Grey, LED indicators: Battery replacement. Width: 119 mm, Depth: 375 mm, Height: 168 mm




Features		Design	
UPS topology *	Line-Interactive	Form factor *	Tower
Output power capacity *	0.62 kVA	Product colour *	Grey
Output power *	390 W	LED indicators	Battery replacement
Waveform *	Sine	Certification	REACH, PEP, EOLI
Input frequency *	50/60 Hz	Operational conditions	
Automatic Voltage Regulation (AVR)	✓	Operating temperature (T-T)	0 - 40 °C
Surge energy rating	320 J	Storage temperature (T-T)	-15 - 45 °C
Hold time (max)	2 ms	Operating relative humidity (H-H)	0 - 95%
Efficiency	97.4%	Storage relative humidity (H-H)	0 - 95%
Emergency Power Off (EPO)	✗	Operating altitude	0 - 3000 m
Noise level	45 dB	Non-operating altitude	0 - 15000 m
Surge protection	✓	Technical details	
Surge protection features	Digital Subscriber Line (DSL), Fax, Modem, Network	Sustainability certificates	RoHS
Audible alarm(s)	✓	Harmonized System (HS) code	85078000
Audible alarm modes	Low battery alarm, Overload alarm	Weight & dimensions	
Auto-restart	✓	Width	119 mm
Ports & interfaces		Depth	375 mm
AC outlet types	C13 coupler	Height	168 mm
Power plug	C14 coupler	Weight	12.3 kg
AC outlets quantity	4 AC outlet(s)	Package width	262 mm
Number of output IEC jumpers	2	Package depth	508 mm
Serial interface	✓	Package height	318 mm
Serial interface type	RS-232	Package weight	13.2 kg
Serial ports quantity	1	Packaging data	
Battery		Cables included	RS-232
Battery technology	Sealed Lead Acid (VRLA)	Manual	✓
Battery capacity	132 VAh	Software CD	✓

Battery		Logistics data	
Typical backup time at full load	5.5 min	Products per pallet	12 pc(s)
Typical backup time at half load	15.8 min	Other features	
Battery life (max)	5 year(s)	Nominal output voltage	230 V
Battery recharge time	5.5 h	Nominal input voltage	230 V
Automatic battery test	✓		



9865745932648

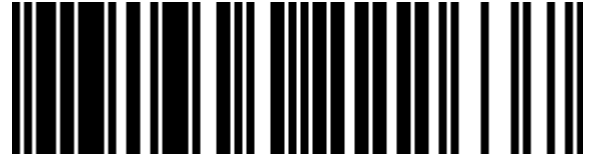

0731304222637



731304222637

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.