

Epson LQ-350 dot matrix printer 360 x 180 DPI 347 cps

Brand : Epson

Product code: C11CC25002

Product name : LQ-350

24 pins, 80 columns, 24 Needles, 347 chars/s, 360 x 180 dpi, USB 2.0 Type B, RS-232, Bidirectional parallel

Epson LQ-350 dot matrix printer 360 x 180 DPI 347 cps:


The highly reliable Epson LQ-350 has a mean time between failure of 10,000 operating hours, and is ideal for front and back office applications needing continuous paper or multi-part stationery.

A very economical printer to run, the LQ-350 helps save money with its high ribbon yield of 2.5 million characters and its low power consumption. Using just 1.3W in sleep mode and 23W when powered on, the LQ-350 is qualified by ENERGY STAR for its excellent energy efficiency.

Easy to integrate, the LQ-350 has Parallel, Serial and USB interfaces as standard, and will fit neatly onto desks thanks to its compact design and cable management system.



Printing		Operational conditions	
Maximum resolution *	360 x 180 DPI	Operating relative humidity (H-H)	10 - 80%
Maximum printing width (columns) *	80	System requirements	
Maximum print speed *	347 cps	Windows operating systems supported	✓
Maximum print speed (draft)	260 cps	Bundled software	Epson Status Monitor
Maximum print speed (LQ)	86 cps	Weight & dimensions	
Maximum number of copies	3 copies	Width	348 mm
Paper handling		Depth	275 mm
Paper tray media types	Envelopes, Labels	Height	154 mm
Features		Weight	4.1 kg
Product colour *	Black	Packaging data	
Buffer size *	128 KB	Quantity per pack	1 pc(s)
Sound pressure level (printing) *	53 dB	Package width	360 mm
Country of origin	Indonesia	Package depth	425 mm
Ports & interfaces		Package height	220 mm
Standard interfaces *	Parallel, RS-232, USB 2.0	Package weight	5.11 kg
Endurance		Technical details	
Print head *	24-pin	Sustainability certificates	ENERGY STAR
Print head life	400 million characters	Logistics data	
Ribbon life	2.5 million characters	Products per pallet	45 pc(s)
Mean time between failures (MTBF)	10000 h	Pallet gross length	120 cm
Power		Pallet gross width	80 cm
Power consumption (typical)	22 W	Pallet gross height	2.13 m
AC input voltage	200 - 240 V	Products per pallet layer	5 pc(s)
Operational conditions		Products per pallet layer (UK)	6 pc(s)
Operating temperature (T-T)	0 - 35 °C	Products per pallet (UK)	54 pc(s)
		Pallet length (UK)	120 cm
		Pallet width (UK)	100 cm
		Pallet height (UK)	2.13 m

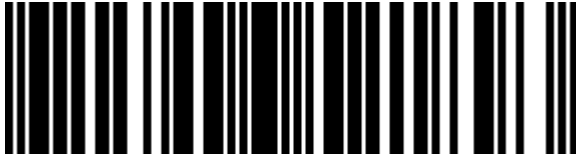

8715946521893

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 23-JAN-2023. Prints or copies of Information are only valid on the printed Publication date