



APC SUA750RMI1U uninterruptible power supply (UPS) Line-Interactive 0.75 kVA 480 W 4 AC outlet(s)

Brand : APC

Product code: SUA750RMI1U

Product name : SUA750RMI1U



Smart-UPS 750VA USB RM 1U 230V

APC SUA750RMI1U uninterruptible power supply (UPS) Line-Interactive 0.75 kVA 480 W 4 AC outlet(s):


Smart-UPS

Intelligent and efficient network power protection from entry level to scaleable runtime. Ideal UPS for servers, point-of-sale, routers, switches, hubs and other network devices.

APC SUA750RMI1U. UPS topology: Line-Interactive, Output power capacity: 0.75 kVA, Output power: 480 W. AC outlet types: C13 coupler, Power plug: C14 coupler, AC outlets quantity: 4 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Typical backup time at full load: 7.1 min, Typical backup time at half load: 23.6 min. Form factor: Rackmount, Product colour: Black, Grey, Rack capacity: 1U. Width: 432 mm, Depth: 660 mm, Height: 44 mm



Features		Battery	
UPS topology *	Line-Interactive	Typical backup time at full load	7.1 min
Output power capacity *	0.75 kVA	Typical backup time at half load	23.6 min
Output power *	480 W	Hot-swap battery	✓
Waveform *	Sine	Automatic battery test	✓
Input operation voltage (min) *	151 V	Design	
Input operation voltage (max) *	302 V	Form factor *	Rackmount
Input frequency *	50/60 Hz	Rack capacity	1U
Output operation voltage (min)	230 V	Product colour *	Black, Grey
Output operation voltage (max)	230 V	LED indicators	Battery replacement
Output frequency	57/63 Hz	Operational conditions	
Automatic Voltage Regulation (AVR)	✓	Operating temperature (T-T)	0 - 40 °C
Surge energy rating	480 J	Storage temperature (T-T)	-15 - 45 °C
Noise level	55 dB	Operating relative humidity (H-H)	0 - 95%
Surge protection	✓	Storage relative humidity (H-H)	0 - 95%
Audible alarm(s)	✓	Operating altitude	0 - 3000 m
Auto-restart	✓	Non-operating altitude	0 - 15000 m
Ports & interfaces		Technical details	
AC outlet types	C13 coupler	Sustainability certificates	RoHS
Power plug	C14 coupler	Weight & dimensions	
AC outlets quantity	4 AC outlet(s)	Width	432 mm
Number of output IEC jumpers	2	Depth	660 mm
USB port	✓	Height	44 mm
Serial interface	✓	Weight	21.8 kg
Serial interface type	RS-232	Packaging data	
SmartSlot	✓	Rack mount kit	✓
Battery		Cables included	RS-232, USB cable
Battery technology	Sealed Lead Acid (VRLA)	Manual	✓
		Logistics data	
		Harmonized System (HS) code	85078000

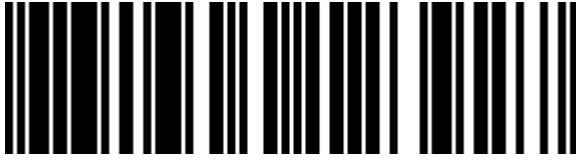

0731304123927



731304123927



0731304243588



731304243588

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.