



## Lindy USB 2.0 Cat.5 Extender 50m, Power over RJ45

Brand : Lindy

Product code: 42681

Product name : USB 2.0 Cat.5 Extender 50m, Power over RJ45




- Extend 4 USB 2.0 ports up to 50m using low cost Cat5/5e/6 network cable (not included)
- Power over Cable requires a single power supply to be connected to the transmitter only
- Supports USB 2.0 High Speed and USB 1.1 Full Speed / Low Speed
- Plug & Play installation

50m 4 Port USB 2.0 Cat.6 Extender

Lindy USB 2.0 Cat.5 Extender 50m, Power over RJ45. Type: Network transmitter & receiver, Maximum transfer distance: 50 m, Data transfer rate: 480 Mbit/s. Contact material: Phosphor bronze, Connector contacts plating: Gold, Connector material: Gold. Product colour: Black, Housing material: Metal, Certification: CE, UKCA, FCC, RoHS, REACH. Output voltage: 24 V, Output current: 0.5 A, Power note: 3.5/1.35mm DC. Weight: 415 g, Transmitter width: 6 cm, Transmitter depth: 6.7 cm



<b>Performance</b>		<b>Power</b>	
Type *	Network transmitter & receiver	Power note	3.5/1.35mm DC
Maximum transfer distance *	50 m	Included power plug types	AU, EU, UK, US
Data transfer rate	480 Mbit/s	<b>Operational conditions</b>	
Cable types supported	Cat5, Cat5e, Cat6	Operating temperature (T-T)	0 - 70 °C
Chipset (transmitter)	NS1021	Storage temperature (T-T)	-20 - 80 °C
Plug and Play	✓	Operating relative humidity (H-H)	0 - 90%
<b>Ports &amp; interfaces</b>		Storage relative humidity (H-H)	0 - 90%
Ethernet LAN (RJ-45) ports	2	<b>Weight &amp; dimensions</b>	
RJ-45 ports quantity (transmitter)	1	Weight	415 g
RJ-45 ports quantity (receiver)	1	Transmitter width	6 cm
USB 2.0 ports quantity	5	Transmitter depth	6.7 cm
DC-in jack	✓	Transmitter height	2.3 cm
Contact material	Phosphor bronze	Receiver width	11 cm
Connector contacts plating	Gold	Receiver depth	6.4 cm
Connector material	Gold	Receiver height	2.3 cm
<b>Design</b>		<b>Packaging content</b>	
Product colour	Black	Cables included	USB Type-A to USB Type-B
Housing material	Metal	Manual	✓
LED indicators	✓	<b>Packaging data</b>	
Certification	CE, UKCA, FCC, RoHS, REACH	Package type	Box
<b>Power</b>		Package width	215 mm
External power adapter	✓	Package depth	155 mm
Output voltage	24 V	Package height	50 mm
Output current	0.5 A	Package volume	600 cm <sup>3</sup>
Power over Ethernet (PoE)	✓	<b>Logistics data</b>	
		Harmonized System (HS) code	85176990

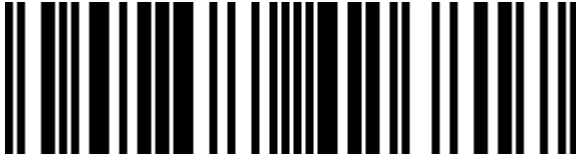

4002888426817

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 11-MAY-2023. Prints or copies of Information are only valid on the printed Publication date