Canon

Canon PIXMA TS9550 Inkjet A3 4800 x 1200 DPI Wi-Fi

Brand : Canon   **Product family:** PIXMA   **Product code:** 2988C008
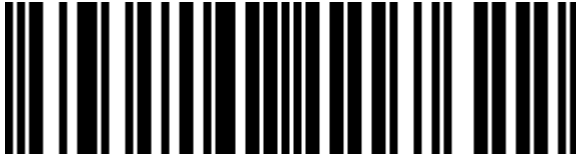
Product name : TS9550

4800 x 1200 dpi, A3, black, 9.7 kg, 49.5 dB, 100 - 240 V, 50/60 Hz
Canon PIXMA TS9550. Print technology: Inkjet, Printing: Colour printing, Maximum resolution: 4800 x
1200 DPI. Copying: Colour copying. Scanning: Colour scanning, Optical scanning resolution: 1200 x 2400
DPI. Maximum ISO A-series paper size: A3. Wi-Fi. Direct printing. Product colour: Black

Printing

Print technology *	Inkjet
Printing *	Colour printing
Duplex printing *	✔
Maximum resolution *	4800 x 1200 DPI
Print speed (ISO/IEC 24734) mono	15 ipm
Print speed (ISO/IEC 24734) colour	10 ipm

Copying

Copying *	Colour copying
Time to first copy (colour, normal)	19 s
Copier resize	25 - 400%

Scanning

Scanning *	Colour scanning
Optical scanning resolution *	1200 x 2400 DPI
Maximum scan area	216 x 297 mm
Scanner type *	Flatbed & ADF scanner
Scan technology	CIS
Input colour depth	16 bit
Output colour depth	8 bit

Fax

Faxing *	✘

Input & output capacity

Maximum input capacity	100 sheets

Paper handling

Maximum ISO A-series paper size *	A3
Paper tray media types *	Envelopes, Glossy paper, High resolution paper, Matte paper, Photo paper, Plain paper, Semi-glossy paper
ISO A-series sizes (A0...A9) *	A3, A4, A5
ISO B-series sizes (B0...B9)	B5

Ports & interfaces

Direct printing *	✔
USB port	✔

Ports & interfaces

USB 2.0 ports quantity	1

Network

Wi-Fi *	✔
Ethernet LAN *	✔
Cabling technology	10/100Base-T(X)
Ethernet LAN data rates	10,100 Mbit/s
Mobile printing technologies	Apple AirPrint, Google Cloud Print, PIXMA Cloud Link

Performance

Card reader integrated	✔
Compatible memory cards	MicroSD (TransFlash), MicroSDHC, MicroSDXC, SD, SDHC, SDXC

Design

Product colour *	Black
Market positioning *	Home & office
Built-in display *	✔
Display	LCD
Display diagonal	10.8 cm (4.25")
Control type	Touch

Power

Power consumption (copying)	14 W
Power consumption (standby)	2 W
Power consumption (off)	0.3 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz

Operational conditions

Operating relative humidity (H-H)	10 - 80%
Operating temperature (T-T)	15 - 30 °C

Weight & dimensions

Width	468 mm
Depth	366 mm
Height	193 mm
Weight	9.7 kg

Logistics data

Harmonized System (HS) code	84433100

4549292117622