

CyberPower PR3000ERT2U uninterruptible power supply (UPS) Line-Interactive 3 kVA 3000 W 8 AC outlet(s)

Brand : CyberPower

Product code: PR3000ERT2U

Product name : PR3000ERT2U



PR3000ERT2U, 3000 VA, 3000 W, 159-288 VAC, 50/60 Hz, IEC C20, 6x IEC C13, 2x IEC C19, RJ-45, RS-232, USB, 433x86.5x500 mm

[CyberPower PR3000ERT2U uninterruptible power supply \(UPS\) Line-Interactive 3 kVA 3000 W 8 AC outlet\(s\):](#)

CyberPower PR3000ERT2U Line-Interactive UPS, with seamless Pure Sine Wave, provides the best power protection available for office system devices including PCs, workstations, networking devices, and peripherals. It's typically integrated in the back office, server room, and data center environment. The rackmount / tower convertible design gives it enhanced flexibility for installation and operation in almost any environment.

Multiple UPS systems can be connected to a single main Emergency Power Off (EPO) switch. In the event of an emergency, the UPS systems can be shut down immediately with the EPO button. As for battery maintenance, the UPS allows battery hot-swapping, which enables users to perform normal battery maintenance without significant interruption.


Features		Battery	
UPS topology *	Line-Interactive	Battery technology	Sealed Lead Acid (VRLA)
Output power capacity *	3 kVA	Typical backup time at full load	1.3 min
Output power *	3000 W	Typical backup time at half load	6.4 min
Waveform *	Pure sine	Battery recharge time	3 h
Input operation voltage (min) *	159 V	Hot-swap battery	✓
Input operation voltage (max) *	288 V		
Input frequency *	50/60 Hz		
Output operation voltage (min)	220 V		
Output operation voltage (max)	240 V		
Output frequency	50/60 Hz		
Automatic Voltage Regulation (AVR)	✓		
Surge energy rating	2430 J		
Transfer time (Line Mode to Battery Mode)	4 ms		
Number of input phases	1		
Number of output phases	1		
Power factor	1		
Power Factor Correction (PFC) type	Active		
Emergency Power Off (EPO)	✓		
EMI/RFI noise filtering	✓		
Noise level	57.5 dB		
Power protection features	Overload		
Audible alarm(s)	✓		
Audible alarm modes	Alarm when on battery, Fault, Low battery alarm, Overload alarm		
Ports & interfaces		Design	
AC outlet types	C13 coupler, C19 coupler	Form factor *	Rackmount/Tower
Power plug	C20 coupler	Housing material	Metal
AC outlets quantity	8 AC outlet(s)	Rack capacity	2U
USB port	✓	Cable length	2.4 m
Serial interface	✓	Product colour *	Black
Serial interface type	RS-232	Display type	LCD
RS-232 ports	1	LED indicators	Fault, Power
Ethernet LAN (RJ-45) ports	2	Certification	CE , FCC A , UL , RCM , VCCI
Emergency Power Off (EPO) connector	✓		
		Operational conditions	
		Operating temperature (T-T)	0 - 40 °C
		Storage temperature (T-T)	-15 - 45 °C
		Operating relative humidity (H-H)	0 - 95%
		Storage relative humidity (H-H)	0 - 95%
		Operating altitude	0 - 3000 m
		Non-operating altitude	0 - 15000 m
		Technical details	
		Sustainability certificates	RoHS, ENERGY STAR
		Weight & dimensions	
		Width	433 mm
		Depth	500 mm
		Height	86.5 mm
		Weight	32.3 kg
		Package width	560 mm
		Package depth	620 mm
		Package height	275 mm
		Package weight	40.3 kg

Packaging data

Cables included	Serial, USB cable
-----------------	-------------------

Logistics data

Harmonized System (HS) code	85078000
-----------------------------	----------

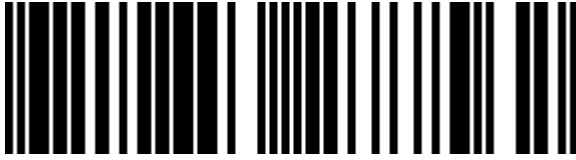

4712856277562

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 20-MAR-2024. Prints or copies of Information are only valid on the printed Publication date