Linksys

Linksys MR8300 wireless router Gigabit Ethernet Tri-band (2.4 GHz / 5 GHz / 5 GHz) Black

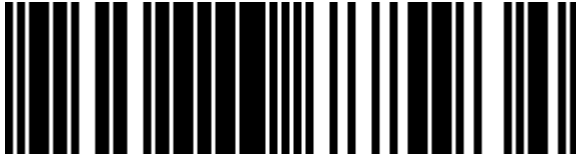**Brand :** Linksys   **Product code:** MR8300-UK

Product name : MR8300

- Powerful Tri-Band router with combined speeds of up to 2.2 Gbps
- Built-in Mesh WiFi technology lets you expand your coverage as your needs grow
- Easy setup with the Linksys app
MR8300, AC2200, MU-MIMO, 2.4+5+5 GHz, 802.11a/b/g/n/ac, USB 3.0, WAN, LAN, 512MB RAM, 256MB Flash, 213.7x161.8x54.8 mm
Linksys MR8300. WAN connection type: RJ-45. Wi-Fi band: Tri-band (2.4 GHz / 5 GHz / 5 GHz), Top Wi-Fi standard: Wi-Fi 5 (802.11ac), WLAN data transfer rate (max): 2134 Mbit/s. Ethernet LAN interface type: Gigabit Ethernet, Networking standards: IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n. Security algorithms: 128-bit AES, WPA2. Product type: Tabletop router, Product colour: Black, LED indicators: LAN, USB

WAN connection	
Ethernet WAN *	✓
DSL WAN *	✗
SIM card slot *	✗
3G/4G USB modem compatibility *	✗
WAN connection type	RJ-45

Wireless LAN features	
Wi-Fi band *	Tri-band (2.4 GHz / 5 GHz / 5 GHz)
Top Wi-Fi standard *	Wi-Fi 5 (802.11ac)
WLAN data transfer rate (max) *	2134 Mbit/s
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac)

Network	
Ethernet LAN *	✓
Ethernet LAN interface type *	Gigabit Ethernet
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n

Mobile network	
3G	✗
4G	✗

Ports & interfaces	
Ethernet LAN (RJ-45) ports *	4
USB port *	✓
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	1
DC-in jack	✓

Management features	
Web-based management	✓
Reset button	✓
WPS push button	✓

Security	
Security algorithms	128-bit AES, WPA2

Design	
Product colour	Black
LED indicators	LAN, USB

Design	
On/off switch	✓
Product type *	Tabletop router

Antenna	
Antenna design *	External
Antennas quantity	4

Features	
Built-in processor	✓
Processor frequency	716 MHz
Processor cores	4
Internal memory	512 MB
Flash memory	256 MB
Firmware upgradeable	✓
Certification	FCC

Power	
Power source type *	AC
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Output voltage	12 V
Output current	2 A

Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-20 - 60 °C
Operating relative humidity (H-H)	10 - 80%
Storage relative humidity (H-H)	5 - 90%

Weight & dimensions	
Width	161.8 mm
Depth	213.7 mm
Height	54.8 mm
Weight	608 g

Packaging data	
Number of products included	1 pc(s)

Logistics data	
Harmonized System (HS) code	85176990

0745883775934

745883775934