

ASUS ProArt PA279CV 68.6 cm (27") 3840 x 2160 pixels 4K Ultra HD LED Black, Silver

Brand : ASUS

Product family: ProArt

Product code: 90LM06M1-B01170

Product name : PA279CV

- 27-inch 4K UHD (3840 x 2160) LED backlight display with IPS 178° wide viewing angle panel
 - International color standard 100% sRGB and 100% Rec. 709 wide color gamut
 - Calman Verified with factory calibrated for excellent Delta E < 2 color accuracy
 - Extensive connectivity including DP over USB-C™ with 65W Power Delivery, DisplayPort, HDMI, USB 3.0 hub
 - Adaptive-Sync technology (40~60Hz) to animated content with fast action and eliminate screen tearing
 - ASUS-exclusive ProArt Preset and ProArt Palette provide numerous adjustable color parameters
 - Ergonomic design with +35° ~ -5° tilt, ±45° swivel, ±90° pivot and 150mm height adjustments for a comfortable viewing experience
- 27", IPS, 4K UHD, 3840 x 2160, 5ms, 16:9, HDCP, 2 x HDMI, DisplayPort, USB Type-C, 4 x USB Type-A, 3.5mm, Flicker free, HDR-10, VESA, Frameless, 614 x 370 x 60 mm, 5.7 Kg




Display		Ports & interfaces	
Display diagonal *	68.6 cm (27")	HDMI *	✓
Display resolution *	3840 x 2160 pixels	HDMI ports quantity	2
HD type *	4K Ultra HD	HDMI version	2.0
Native aspect ratio *	16:9	DisplayPorts quantity	1
Display technology *	LED	DisplayPort version	1.2
Panel type *	IPS	Audio input	✗
Touchscreen *	✗	Headphone out *	✓
Display brightness (typical)	350 cd/m ²	Headphone outputs	1
Response time	5 ms	Headphone connectivity	3.5 mm
Screen shape *	Flat	HDCP	✓
Supported graphics resolutions	3840 x 2160	AC (power) in	✓
Aspect ratio	16:9	Ergonomics	
Contrast ratio (typical) *	1000:1	VESA mounting *	✓
Contrast ratio (dynamic)	100000000:1	Panel mounting interface	100 x 100 mm
Dynamic contrast ratio marketing name	SmartContrast	Cable lock slot *	✓
Maximum refresh rate *	60 Hz	Cable lock slot type	Kensington
Viewing angle, horizontal	178°	Height adjustment *	✓
Viewing angle, vertical	178°	Height adjustment	15 cm
Display number of colours *	1.073 billion colours	Pivot	✓
Pixel pitch	0.155 x 0.155 mm	Pivot angle	-90 - 90°
Viewable size, horizontal	59.7 cm	Swivelling	✓
Viewable size, vertical	33.6 cm	Swivel angle range	-45 - 45°
Viewable size diagonal	68.5 cm	Tilt angle range	-5 - 35°
Digital horizontal frequency	29 - 160 kHz	Tilt adjustment	✓
Digital vertical frequency	40 - 60 Hz	Power	
High Dynamic Range (HDR) supported	✓	Energy efficiency class (SDR) *	G
High Dynamic Range (HDR) technology	High Dynamic Range 10 (HDR10)	Energy efficiency class (HDR) *	G
sRGB coverage (typical)	100%	Energy consumption (SDR) per 1000 hours *	32 kWh
Performance		Energy consumption (HDR) per 1000 hours *	54 kWh
VESA Adaptive Sync support	✓	Power consumption (typical) *	32.1 W
		Power consumption (standby) *	0.5 W

Performance		Power	
Flicker-free technology	✓	Power consumption (off)	0.2 W
Low Blue Light technology	✓	AC input voltage	100 - 240 V
Multimedia		AC input frequency	50/60 Hz
Built-in speaker(s) *	✓	Energy efficiency scale	A to G
Built-in camera *	✗	Packaging content	
Number of speakers	2	Stand included	✓
RMS rated power	2 W	Cables included	AC
Design		Quick start guide	✓
Market positioning *	Photo editing	Weight & dimensions	
Product colour *	Black, Silver	Width (with stand)	614 mm
Frameless design	✓	Depth (with stand)	228 mm
Front bezel colour	Black	Height (with stand)	524 mm
Detachable stand	✓	Weight (with stand)	8.6 kg
Feet colour	Silver	Width (without stand)	61.4 cm
Certification	TUV Flicker-free , TUV Low Blue Light, Calman Verified	Depth (without stand)	6 cm
Ports & interfaces		Height (without stand)	37 cm
Built-in USB hub *	✓	Weight (without stand)	5.7 kg
USB hub version	3.2 Gen 1 (3.1 Gen 1)	Packaging data	
Number of upstream ports	4	Package width	680 mm
USB Type-A downstream ports quantity	4	Package depth	161 mm
USB Type-C downstream ports quantity	1	Package height	516 mm
DVI port	✗	Package weight	11.2 kg
		Package type	Box
		Logistics data	
		Harmonized System (HS) code	85285210



4718017853200

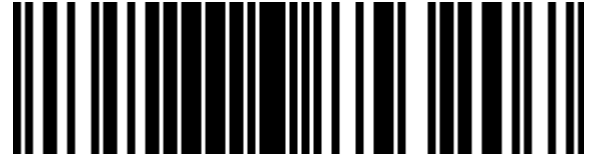


0192876853207



192876853207



4718017853170

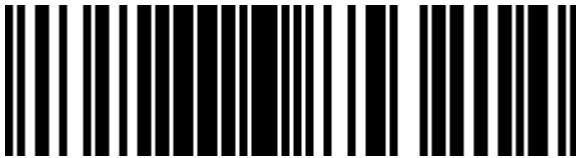

0192876853214



192876853214

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.