

SONY

## Sony α ZV-E10L MILC 24.2 MP CMOS 6000 x 4000 pixels Black

Brand : Sony

Product family: α

Product code: ZVE10LBDI.EU


Product name : ZV-E10L

Sony α ZV-E10L. Camera type: MILC, Megapixel (approx.): 24.2 MP, Sensor type: CMOS, Maximum image resolution: 6000 x 4000 pixels. ISO sensitivity (max): 320000. Digital zoom: 8x, Focal length range: 16 - 50 mm. Fastest camera shutter speed: 1/4000 s. HD type: 4K Ultra HD, Maximum video resolution: 3840 x 2160 pixels. Display diagonal: 7.62 cm (3"), Touchscreen. Weight: 343 g. Product colour: Black



<b>Picture quality</b>		<b>Video</b>	
Camera type *	MILC	Analog signal format system	NTSC, PAL
Megapixel (approx.) *	24.2 MP	Video formats supported	XAVC S
Sensor type *	CMOS	<b>Audio</b>	
Maximum image resolution *	6000 x 4000 pixels L: 6000 x 4000 (24 M), M: 4240 x 2832 (12 M), S: 3008 x 2000 (6.0 M) L: 5328 x 4000 (21 M), M: 3776 x 2832 (11 M), S: 2656 x 2000 (5.3 M)	Built-in microphone *	✓
Still image resolution(s) *	L: 6000 x 3376 (20 M), M: 4240 x 2400 (10 M), S: 3008 x 1688 (5.1 M) L: 4000 x 4000 (16 M), M: 2832 x 2832 (8.0 M), S: 2000 x 2000 (4.0 M)	Built-in speaker(s)	✓
Image stabilizer *	✓	Audio system	Mono
Image stabilizer location	Lens	<b>Memory</b>	
Supported aspect ratios	1:1, 3:2, 4:3, 16:9	Compatible memory cards *	MS Micro (M2), MS PRO Duo, MS Pro-HG Duo, MicroSD (TransFlash), MicroSDHC, MicroSDXC, SD, SDHC, SDXC
Total megapixels	25 MP	Memory slots	1
Image sensor size (W x H)	23.5 x 15.6 mm	<b>Display</b>	
Sensor format	Advanced Photo System type-C (APS-C)	Display *	TFT
Image formats supported *	JPEG, RAW	Touchscreen *	✓
<b>Lens system</b>		Display diagonal *	7.62 cm (3")
Digital zoom *	8x	Display diagonal (metric)	7.5 cm
Focal length range	16 - 50 mm	Display resolution	921600 dot
Minimum focal length (35mm film equiv)	24 mm	Flip-out screen	✓
Maximum focal length (35mm film equiv)	75 mm	Vari-angle LCD display	✓
Minimum aperture number	36	<b>Ports &amp; interfaces</b>	
Maximum aperture number	3.5	PictBridge *	✗
Lens structure (elements/groups)	9/8	USB version *	2.0
Filter size	4.05 cm	USB connector	USB Type-C
Number of diaphragm blades	7	HDMI *	✓
Lens mount interface	E mount	Headphone outputs	1
<b>Focusing</b>		Headphone connectivity	3.5 mm
Auto Focus (AF) points	425	<b>Network</b>	
Auto Focus (AF) points selection	Auto	Bluetooth *	✓
<b>Exposure</b>		Bluetooth version	4.1
ISO sensitivity (min) *	100	<b>Camera</b>	
		White balance *	Auto, Cloudy, Daylight, Flash, Fluorescent, Manual, Shade, Underwater
		Shooting modes *	Aperture priority, Auto, Lens priority, Manual, Program, Scene
		Photo effects *	Black&White, Sepia

<b>Exposure</b>		<b>Camera</b>	
ISO sensitivity (max) *	320000	Self-timer delay *	2,5,10 s
ISO sensitivity	100, 200, 400, 800, 1600, 3200, 6400, 32000	Contrast adjustment	✓
Light exposure modes *	Auto, Manual	Brightness adjustment	✓
Light exposure control	Program AE	Saturation adjustment	✓
Light exposure correction *	± 5EV (1/2EV; 1/3EV step)	Camera playback	Single image, Slide show
Light metering *	Centre-weighted, Evaluative (Multi-pattern), Matrix, Spot	Tripod mounting supported *	✓
Auto Exposure (AE) lock	✓	<b>Design</b>	
<b>Shutter</b>		Product colour *	
Fastest camera shutter speed *		Black	
Slowest camera shutter speed *		<b>Battery</b>	
Camera shutter type		Battery life (CIPA standard)	
Electronic, Mechanical		440 shots	
		Battery type	
		NP-FW50	
		Number of batteries supported	
		1	
<b>Flash</b>		<b>Operational conditions</b>	
Flash modes *		Operating temperature (T-T)	
Auto, Flash off, Flash on, Pre-flash, Slow synchronization		0 - 40 °C	
Flash exposure lock		<b>Weight &amp; dimensions</b>	
✓		Width	
Flash sync-speed		115.2 mm	
1/160 s		Depth	
Flash exposure correction		44.8 mm	
±3EV (1/2; 1/3 EV step)		Height	
Pre-flash		64.2 mm	
✓		Weight	
		343 g	
		Lens diameter	
		6.47 cm	
		Lens length	
		2.99 cm	
		Lens weight	
		116 g	
<b>Video</b>		<b>Packaging content</b>	
Video recording *		Shoulder strap	
✓		✓	
Maximum video resolution *		AC adapter included	
3840 x 2160 pixels		✓	
HD type *		Cables included	
4K Ultra HD		USB	
Video resolutions		Batteries included	
1920 x 1080, 3840 x 2160 pixels		✓	
		Lens cap included	
		✓	

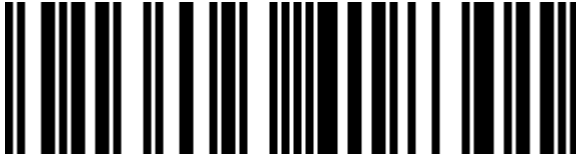

5013493418301

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 29-JUN-2023. Prints or copies of Information are only valid on the printed Publication date