PHILIPS

Philips Signage Solutions 32BDL4511D/00 Signage Display Digital A-board 81.3 cm (32") ADS 400 cd/m² Full HD Black 24/7

Brand : Philips

Product family: Signage Solutions
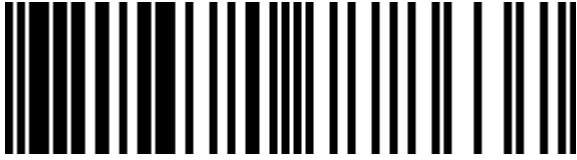
Product code: 32BDL4511D/00

Product name :
32BDL4511D/00

Philips Signage Solutions 32BDL4511D/00. Product design: Digital A-board. Display diagonal: 81.3 cm (32"), Display technology: ADS, Display resolution: 1920 x 1080 pixels, Display brightness: 400 cd/m², HD type: Full HD. Operating hours (hours/days): 24/7. Product colour: Black

Display

Display diagonal *	81.3 cm (32")
Display technology *	ADS
Display resolution *	1920 x 1080 pixels
Display brightness *	400 cd/m²
HD type *	Full HD
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	16.7 million colours
Pixel pitch	0.36375 x 0.36375 mm
Panel life	50000 h
Native refresh rate	60 Hz
Haze rate	25%

Ports & interfaces

HDMI ports quantity *	3
HDMI version	2.0
HDMI input ports quantity	2
HDMI output ports quantity	1
DVI port *	✓
DVI-I ports quantity	1
DisplayPorts quantity *	2
DisplayPorts in	1
DisplayPorts out	1
USB port *	✓
USB ports quantity	2
USB version	2.0
Ethernet LAN *	✓
Ethernet LAN (RJ-45) ports	1
RS-232C	✓
Remote (IR) input	1
Remote (IR) output	1

Audio

Built-in speaker(s) *	✓
Number of built-in speakers	2
RMS rated power	20 W

Design

Product design *	Digital A-board

Design

Placement supported *	Indoor
Orientation	Horizontal/Vertical
Product colour *	Black
VESA mounting *	✓
Panel mounting interface	100 x 100,200 x 200 mm

Performance

Purpose *	Commercial
Operating hours (hours/days)	24/7

Power

Power consumption (typical) *	36 W
Power consumption (standby) *	0.5 W
Energy efficiency class (SDR)	G
AC input voltage	100/240 V
AC input frequency	50/60 Hz

Computer system

Video formats supported	H.263, H.264, H.265, MPEG
Audio formats supported	AAC, HE-AAC
Image formats supported	BMP, JPG, PNG

Weight & dimensions

Display width	726.5 mm
Display depth	65.1 mm
Display height	425.4 mm
Display weight	5.7 kg

Packaging content

Remote control included	✓
Batteries included	✓
Cables included	AC, DisplayPort, IR sensor, RS-232

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Certificates

Certification	CE FCC Class A CCC Restriction of Hazardous Substances (ROHS) CB BSMI EMF VCCI PSB ETL CECP EAC

8712581778637