PHILIPS

Philips 43BDL4511D/00 Signage Display Digital A-board 109.2 cm (43") 500 cd/m² 4K Ultra HD Black 24/7

Brand : Philips

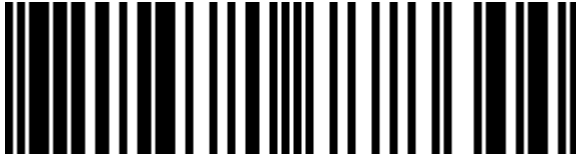**Product name :** 43BDL4511D/00

Product code: 43BDL4511D/00

Philips 43BDL4511D/00. Product design: Digital A-board. Display diagonal: 109.2 cm (43"), Display resolution: 3840 x 2160 pixels, Display brightness: 500 cd/m², HD type: 4K Ultra HD. Operating hours (hours/days): 24/7. Product colour: Black

Display

Display diagonal *	109.2 cm (43")
Display resolution *	3840 x 2160 pixels
Display brightness *	500 cd/m²
HD type *	4K Ultra HD
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.2451 x 0.2451 mm
Display diagonal (metric)	108 cm
Panel life	50000 h

Ports & interfaces

HDMI ports quantity *	3
HDMI version	2.0
DVI port *	✔
DVI-I ports quantity	1
DisplayPorts quantity *	2
DisplayPorts in	1
DisplayPorts out	1
USB port *	✔
USB ports quantity	2
USB version	2.0
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Audio (L/R) in	1
Audio (L/R) out	1
RS-232C	✔
Remote (IR) input	1
Remote (IR) output	1
OPS module slot	✔

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	10 W

Design

Product design *	Digital A-board
Placement supported *	Indoor

Performance

Purpose *	Commercial
On Screen Display (OSD)	✔
On Screen Display (OSD) languages	Arabic
Operating hours (hours/days)	24/7

Power

Power consumption (typical) *	62 W
Power consumption (max)	170 W
Power consumption (standby) *	0.5 W
Energy efficiency class (SDR)	G
AC input voltage	100/240 V
AC input frequency	50/60 Hz

Computer system

Video formats supported	H.263, H.264, H.265, MPEG
Audio formats supported	AAC, HE-AAC
Image formats supported	BMP, JPEG, PNG

Weight & dimensions

Display width	973 mm
Display depth	63.5 mm
Display height	561.2 mm
Display weight	10.7 kg
Width	973 mm
Depth	63.5 mm
Base width	56.1 cm
Weight	10.7 kg

Packaging content

Remote control included	✔
Batteries included	✔
Cables included	AC, IR sensor, RS-232

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Certificates

Certification	CE FCC Class A CCC Restriction of Hazardous Substances (ROHS) CB BSMI EMF VCCI PSB ETL CECP EAC Energy Star 8.0

Design		Other features	
Product colour *	Black	Maximum refresh rate	60 Hz
VESA mounting *	✓		
Panel mounting interface	200 x 200 mm		

8712581778644