PHILIPS

Philips 43BDL3117P/00 computer monitor 109.2 cm (43") 3840 x 2160 pixels 4K Ultra HD LCD Black
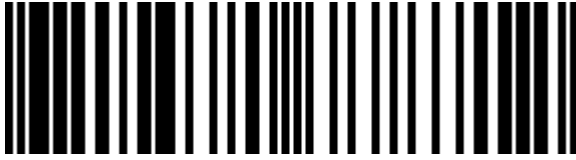
Brand : Philips

Product name : 43BDL3117P/00

Product code: 43BDL3117P/00

43" (3840x2160), 750 cd/m², 220W, 100-240V, 13.94kg
Philips 43BDL3117P/00. Display diagonal: 109.2 cm (43"), Display resolution: 3840 x 2160 pixels, HD type: 4K Ultra HD, Display technology: LCD, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in speaker(s). Built-in USB hub, USB hub version: 2.0. VESA mounting. Product colour: Black

A↑G G

Display

Display diagonal *	109.2 cm (43")
Display resolution *	3840 x 2160 pixels
HD type *	4K Ultra HD
Native aspect ratio *	16:9
Display technology *	LCD
Backlight type	LED
Touchscreen *	✘
Display brightness (typical)	750 cd/m²
Screen shape *	Flat
Supported graphics resolutions	640 x 480 (VGA), 720 x 400, 800 x 600 (SVGA), 1024 x 768 (XGA), 1152 x 864 (XGA+), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 800 (WXGA), 1440 x 900 (WXGA+), 1600 x 1200 (UXGA), 1680 x 1050 (WSXGA+), 1920 x 1080 (HD 1080)
Supported video modes	480p, 576p, 720p, 1080i, 1080p
Contrast ratio (typical) *	1200:1
Contrast ratio (dynamic)	500000:1
Maximum refresh rate *	60 Hz
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours *	1.07 billion colours
Response time (fast)	8 ms
Display diagonal (metric)	108 cm
Haze rate	25%

Performance

Operating hours (hours/days)	24/7

Multimedia

Built-in speaker(s) *	✔
Number of speakers	2
RMS rated power	10 W

Design

Market positioning *	Business
Product colour *	Black

Ports & interfaces

Built-in USB hub *	✔
USB hub version	2.0
DVI port	✔
DVI-I ports quantity	1
HDMI *	✔

Ports & interfaces

HDMI ports quantity	3
HDMI version	2.0
DisplayPorts quantity	1
DisplayPort version	1.2
DC-in jack	✔

Ergonomics

VESA mounting *	✔
Panel mounting interface	200 x 200 mm

Power

Energy efficiency class (SDR) *	G
Energy consumption (SDR) per 1000 hours *	86 kWh
Power consumption (typical) *	80 W
Power consumption (standby) *	0.5 W
Power consumption (max)	220 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Energy efficiency scale	A to G

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-20 - 60 °C
Operating relative humidity (H-H)	20 - 80%
Storage relative humidity (H-H)	5 - 95%
Operating altitude	0 - 3000 m

Weight & dimensions

Width (without stand)	973 mm
Depth (without stand)	76.8 mm
Height (without stand)	561.2 mm
Weight (without stand)	13.9 kg

Sustainability

European Product Registry for Energy Labelling (EPREL) code	1012835

Logistics data

Harmonized System (HS) code	85285210

8712581778712