




ASUS PRIME B560-PLUS Intel B560 LGA 1200 ATX

Brand : ASUS

Product code: 90MB16N0-M0EAY0


Product name : PRIME B560-PLUS

- Intel® LGA 1200 socket: Ready for 11th Gen Intel® Core™ processors
 - Comprehensive cooling: VRM heatsink, flexible M.2 heatsink, PCH heatsink, hybrid fan headers and Fan Xpert 2+
 - ASUS OptiMem: Careful routing of traces and vias to preserve signal integrity for improved memory stability
 - Ultrafast connectivity: PCIe 4.0, Intel® 1 Gb Ethernet, rear USB 3.2 Gen 1 Type-C® and Thunderbolt™ 4 header support
 - 5X Protection III: Multiple hardware safeguards for all-round protection
- ATX, Intel B560 chipset, Socket LGA1200, 4xDDR4 DIMM slots, 7.1ch audio, Gigabit LAN



Processor		Rear panel I/O ports	
Processor manufacturer *	Intel	USB 3.2 Gen 2 (3.1 Gen 2) Type-A ports quantity *	2
Processor socket *	LGA 1200	Ethernet LAN (RJ-45) ports *	1
Compatible processor series *	Intel® Celeron®, Intel® Core™ i3, Intel® Core™ i5, Intel® Core™ i7, Intel® Core™ i9, Intel Pentium G	PS/2 ports quantity	1
Supported processor sockets	LGA 1200 (Socket H5)	VGA (D-Sub) ports quantity *	1
Memory		HDMI ports quantity *	1
Supported memory types *	DDR4-SDRAM	HDMI version	1.4/2.0
Number of memory slots *	4	DisplayPorts quantity	1
Memory slots type	DIMM	DisplayPort version	1.2
Memory channels	Dual-channel	Headphone outputs	3
Non-ECC	✓	Microphone in	✓
Supported memory clock speeds	2133,2400,2666,2800,2933,3200,3333,3466,3600,3733,4000,4266,4400,4600 MHz	USB connector type	USB Type-A, USB Type-C
Maximum internal memory *	128 GB	Network	
Unbuffered memory	✓	Ethernet LAN	✓
Storage controllers		Ethernet interface type	Gigabit Ethernet
Supported storage drive types	HDD & SSD	LAN controller	Intel® I219-V
Supported storage drive interfaces *	M.2, SATA III	Wake-on-LAN ready	✓
Number of storage drives supported	8	Wi-Fi *	✗
Graphics		Features	
Parallel processing technology support *	Not supported	Motherboard chipset *	Intel B560
Maximum resolution	4096 x 2304 pixels	Audio chip	Realtek ALC887 / Realtek ALC897
Internal I/O		Audio output channels *	7.1 channels
USB 2.0 connectors *	2	Component for *	PC
USB 3.2 Gen 1 (3.1 Gen 1) connectors *	1	Motherboard form factor *	ATX
Number of SATA III connectors *	6	Motherboard chipset family *	Intel
S/PDIF out connector	✓	Windows operating systems supported	Windows 10 x64
Front panel audio connector	✓	Harmonized System (HS) code	84733020
ATX Power connector (24-pin)	✓	Expansion slots	
CPU fan connector	✓	PCI Express x1 (Gen 3.x) slots	2
Number of chassis fan connectors	3	PCI Express x16 (Gen 3.x) slots	1
EPS power connector (8-pin)	✓	PCI Express x16 (Gen 4.x) slots	1
Number of COM connectors	1		

Internal I/O		Expansion slots	
TPM connector	✓	Number of M.2 (M) slots	2
Thunderbolt headers	1	BIOS	
12V power connector	✓	BIOS type *	UEFI AMI
RGB LED pin header	✓	BIOS memory size	128 Mbit
Rear panel I/O ports		Clear CMOS jumper	✓
USB 2.0 ports quantity *	4	Weight & dimensions	
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity *	1	Width	305 mm
		Depth	234 mm
		Height	53 mm
		Packaging content	
		Cables included	SATA
		Drivers included	✓
		Other features	
		Weight	891 g

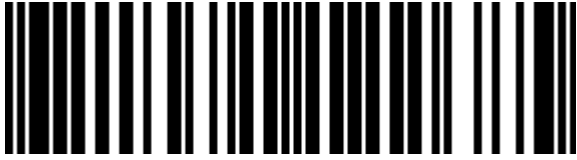

4711081122685



0195553122696



195553122696

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.