



APC APDU10350SW power distribution unit (PDU) 24 AC outlet(s)  
0U Black

Brand : APC


Product code: APDU10350SW

Product name : APDU10350SW

- Maximum Outlet Density All models include 40, 42, or 48 outlets
  - Space Saving
  - High Power Capacity Models now available to provide up to 34.6kW
  - APC Locking Power Cord Compatible Optional AP8700 power cords will fit into any standard IEC receptacle or power inlet
  - Circuit Breaker Monitoring
  - Alternating Phase
  - 60°C (140°F) Operating Temperature
  - Rack PDUs cascaded together via the two ethernet ports on each PDU allow Network Management Cards (NMC) to continue functioning in the event of an AC power loss to a given PDU
  - Hydraulic Magnetic Circuit Breakers
  - Live Swap Network Management Card
  - Environmental Sensor Support
  - Color LCD Display
  - Dual Network Ports
- 50/60 Hz, 200 - 240, 346 - 415VAC, Load Capacity 17300VA



| Design                  |   | Power                                |             |
|-------------------------|---|--------------------------------------|-------------|
| PDU types *             | Switched  | Maximum input current per phase      | 30 A        |
| Type                    | Three-phase   | Maximum total current draw per phase | 24 A        |
| Rack capacity *         | 0U  | Weight & dimensions                  |             |
| Mounting                | Vertical  | Width                                | 56 mm       |
| Product colour          | Black   | Depth                                | 75 mm       |
| Display                 | LCD   | Height                               | 1780 mm     |
| On/off switch           | ✗   | Weight                               | 9.6 kg      |
| Ports & interfaces      |   | Packaging data                       |             |
| AC outlets quantity *   | 24 AC outlet(s)   | Package weight                       | 12.6 kg     |
| Power plug              | IEC 60309   | Package width                        | 262 mm      |
| AC outlet types *       | C13 coupler, C15 coupler, C19 coupler, C21 coupler                            | Package depth                        | 132 mm      |
| Features                |   | Package height                       | 1980 mm     |
| Daisy chain             | ✓   | Operational conditions               |             |
| Certification           | CE, CSA C22.2 No 62368-1, EN 62368-1, FCC part 15 subpart B, UKCA, UL 62368-1 | Operating temperature (T-T)          | -5 - 60 °C  |
| Power                   |   | Storage temperature (T-T)            | -25 - 65 °C |
| Nominal input voltage * | 240V  | Operating relative humidity (H-H)    | 5 - 95%     |
| AC input frequency      | 50 - 60 Hz  | Storage relative humidity (H-H)      | 5 - 95%     |
| Maximum current *       | 24 A  | Operating altitude                   | 0 - 3048 m  |
| Nominal output voltage  | 240 V   | Non-operating altitude               | 0 - 15240 m |
| Load capacity           | 17300 VA  |                                      |             |

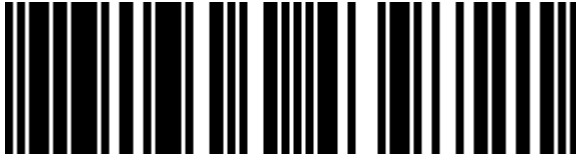

0731304439721



731304439721

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 07-MAY-2024. Prints or copies of Information are only valid on the printed Publication date